MS-OFFICE (F.Y.B.Com.-MS: SEM-II)

=PLOOR(17,3)-

-FLOORETABLE

-PUDGRERATE PRODUCE

=RUQQR(1.5,0.2)

CEILING D:Rounds aumber

9.8	-8 Expl: Multiples of -2 are -8 Expl: Multiples of -6 & -8
=CEILING(-7.5,-2)	→ -8 Expl: Multiples of -2 to -8 -8 -2,-4,-6,-8,-107.5 is between -6 & -8 but -8 is away from zero ∴ -8
=CEILING(7.5,3) =CEILING(-7.5,-3)	→ 9 → -9 -9
=CEILING(7.5,4)	* 8
=CEILING(-7.5,-4) =CEILING(17,2)	18 Nounds number down toward towards number down towards.
=CEILING(17,2) =CEILING(-17,-2)	→ -18
=CEILING(17,3)	→ 18 → -18
=CEILING(-17,-3) = CEILING(17,4)	20
=CEILING(-17,-4) →	-20
=CEILING(1.5,0.2)	16
=CEILING(-1.5,-0.2) → =CEILING(17,-4) →	#NILIMI (ERROR)
=CEILING(-17,4) →	#NUM! (ERROR)

Note: In FLOOR() and CEILING(), both the numbers must have same sign.

SUM(): Adds all the numbers in a range of cells. If there is a text entry in the range then it will be ignored but if text is given as an argument, then it will give an error.

	A	В
1	Sales	5
2	1000	"10"
3	5000	7
4	9000	True
5		3

=SUM(A2:A4)

=SUM(A2:A4,3000)

=SUM(A2,A4)

=SUM(A1:A4)

=SUM(A1:A5)

=SUM(10,50,90)

→ 15000

18000

10000

15000

15000

150

SEM-II)

Excel Basics, Calculations and Functions

=SUM("SALES",100,200)

#VALUE! (ERROR)

=SUM(B1:B5)

(Text Argument "SALES")

=SUM(B1,B3,B5)

=SUM(5,"10",7,True,3)

Expln: Text number "10" is converted into number 10 and True is converted to 1 :. 5+10+7+1+3 = 26. Conversion will take place only if values are given as an argument. In case of range or cell reference; text values, logical values will be

=SUM(A1:B5)

15015

SUMIF(): Adds all the numbers in a range of cells for which given condition is true. If sum_range (second range) is given then values from sum_range are added otherwise values from range (first range) are added where the given

Syntax

he

Ve

SUMIF(range, condition, [sum-range])

Consider the following worksheet:

	A	В	С	D	E
1	GRADE	BASIC	HRA	PF	NET
2	A	1000	150	80	1070
3	В	4000	600	320	4280
4	В	5000	750	400	5350
5	A	3000	450	240	3210

To take the total of NET where BASIC is above 3,500; the formula will be:

=SUMIF(B2:B5,">3500",E2:E5)

9630

To take total of BASIC where BASIC is above 3,500; the formula will be:

=SUMIF(B2:B5,">3500")

9000

To take total of HRA where GRADE is 'A'; the formula will be:

=SUMIF(A2:A5,"A",C2:C5)

600

To take total of PF where PF is 320 or less; the formula will be:

=SUMIF(D2:D5,"<=320") → 640

To take total of NET where PF is 320 or less; the formula will be:

8560

=SUMIF(D2:D5,"<=320",E2:E5)

Note: In second and fourth example Sum_range is not given therefore sum of first range.

=SUMIF(A2:A5,"A")

- STATISTICAL FUNCTIONS -MAX(): This function is used to find highest number between given range of MAX(): This function is used to find highest Humber of the data. If there is a text entry in the range then it will be ignored but if text is given

as an argument, then it will give an error.

		A	
1		Sales 1000	
2			
3	i	5000	
4	t	9000	
5	1		
-	-		

=MAX(A1:A4)=MAX(A2:A4)

=MAX(A1:A4,8000)=MAX(A1:A4,80000)

=MAX(10,30,20)=MAX(10,"ABC",20)

9000

80000

30

→ #VALUE! (ERROR)

MIN(): This function is used to find smallest number between given range of data. If there is a text entry in the range then it will be ignored but if text is given as an argument, then it will give an error. 1000

	A
1	Sales
2	1000
3	5000
4	9000
5	

=MIN(A1:A4)=MIN(A2:A4) =MIN(A1:A4,8000)=MIN(A1:A4,800)=MIN(10,30,20)=MIN(10,"ABC",20) 1000 Consider tire tollers 800

#VALUE! (ERROR)

AVERAGE(): This function is used to find average of given numbers. If there is a text entry in the range then it will be ignored but if text is given as an argument, then it will give an error.

	A
1	Sales
2	1000
3	5000
4	9000
5	

=AVERAGE(A1:A4) =AVERAGE(A2:A4) =AVERAGE(A2:A4,1000) =AVERAGE(10,25,15) =AVERAGE(10,20,"SALES") 5000

4000

16.66667

#VALUE! ERROR

AVERAGEIF(): This function is used to find average of all the numbers in a range of cells for which given condition is true. If average_range (second range) is given then values from average_range are considered otherwise values from range (first range) are considered where the given condition is true.

Syntax

AVERAGEIF(range, condition, [average-range])

Consider the following worksheet:

To take th =AVERA

To take a =AVERA To take a

=AVER To take formula

=AVER To take

=AVER To take be:

=AVE To take

=AVE Note

range. =AVE

=AVI

COU and ' argui

EM-II)

Excel Basics, Calculations and Functions

		A				
	1	NAME	В			7
	2	AJAY	GRADE	DEPT	D	E
	3	SUNIL		A/C	BASIC	NET
	4	VIJAY	B	H.R.	1000	1070
	5	ANIL	B	ADMN	4000	4280
2 6	aver	age of NE	A	SALES	5000	5350
		Pe OI INE	Trul		3000	

To take the

=AVERAGEIF(D2:D5,">3500",E2:E5) ET where BASIC is above 3,500; the formula will be: To take average of BASIC where BASIC is above 3,500; the formula will be:

To take average of basic where GRADE is 'A'; the formula will be:

To take average of NET where department name is starting with letter A; the

=AVERAGEIF(C2:C5,"A*",E2:E5)

To take average of NET where Names are ending with JAY; the formula will be:

=AVERAGEIF(A2:A5,"*JAY",E2:E5)

To take average of NET where Names are not ending with JAY; the formula will

=AVERAGEIF(A2:A5,"<>*JAY",E2:E5) 3745

To take average of BASIC where Names contains letter A; the formula will be:

=AVERAGEIF(A2:A5,"*A*",D2:D5) 3000

Note: In second example Average_range is not given therefore average of first range.

=AVERAGEIF(A2:A5,"A*") #DIV/0! (Error -Average of Text)

=AVERAGEIF(A2:A5,"J*",E2:E5) #DIV/0! (Error-No Record)

COUNT(): Counts the number of cells that contains numbers. Remember Date and Time is treated as number. If there is a text entry in the range or as an argument then it will not give an error.

	A	=COUNT(A1:A4)	7	3
1	Sales	=COUNT(A2:A4)	>	3
2	1000	=COUNT(A1:A5)	+	4
3	5000	=COUNT(A2:A5)	7	4
4	9000	=COUNT(10,20,30)	+	3
5	9-Jul-2009	=COUNT(10,"ABC",20)		→ 2

e is a ment,

MALLEN WAR

in a inge) from

13637

of the

MS-OFFICE (F.Y.B.Com.-MS: SEM-II)

Excel B

Array

larges

Kist

SN

thi

Sy

SI

AVERA

AVERA

COUNTA(): Counts the number of cells that are not empty. If there is a text

entry in the range or as an argument then it will not give an error.

			A
	1		Sales
	2	1	1000
	3	İ	#DIV/0!
	4	1	TRUE
	5	T	9-Jul-2009
	6	-	
1	7		5:30 AM

	=COUNTA(A1:A7)	7	9
-	=COUNTA(A1:A5)	-	15
1	=COUNTA(A1:A6)	7 +	5
1	=COUNTA(A2:A7)		7
	=OLINITA(A1:A/14)	31111111111111111	75
	COLINITA(A1:A/, 111)		8
	=COUNTA(A1:A7,4,"FOX")		11000
	=COUNTA(-	3

=COUNTA(10,20,30) =COUNTA(10,"ABC",20)

COUNTBLANK(): Counts the number of cells that are empty. If there is a text entry in the range or as an argument then it will not give an error.

	A	В
1	Sales	
2	1000	
3	#DIV/0!	Ulaq E
4	TRUE	(A) drive grate
5	9-Jul-2009	
6		GARGINE SE
7	5:30 AM	letter At the f

	ment there are	
	=COUNTBLANK(A1:A7)	V
	=COUNTBLANK(A1:A5)	J
	=COUNTBLANK(A1:A6)	1
	=COUNTBLANK(A2:A7)	1
-	=COUNTBLANK(A1:B7)	8
1	=COUNTBLANK(B1:B7)	7
100	Edverage of BASIC where Names contains	

COUNTIF(): This function will count number of cells that are satisfying a given a second example Average range is not given therefore condition.

		A	В	
	1	GRADE	BASIC	
į	2	A	1000	
	3	В	4000	
	4	В	5000	
	5	A	3000	

=COUNTIF(A2:A5,"A")	>	2
=COUNTIF(B2:B5,">2000")	>	3
=COUNTIF(B2:B5,"<=3000")	>	2

and Trango is are as number if there is a text er

thement then it will not give an error,

LARGE(): This function returns the Kth largest value in a data set. You can use this function to select a value based on its relative standing. For example, you can use LARGE to return the highest, runner-up, or third-place value.

Syntax

LARGE(array,k)

EM-II) text

Excel Basics, Calculations and Functions

Array is the array or range of data for which you want to determine the Kin K is the position (from the largest) in the array or cell range of data to return.

	A	В
1	Data-1	Data-2
2	18	14
3	21	
4	17	16
5	15	12
6	20	14
-		16

=LARGE(A2:A6,1)
=LARGE(A2:A6,3)
=LARGE(A2:A6,4)
=LARGE(A2:A6,2)
=LARGE(B2:B6,1)
=LARGE(B2:B6,2)
=LARGE(B2:B6,3)
=LARGE(A2:B6,3)
~ LINETE A JORG C

→ 21	
→ 18	
→ 17	
→ 20	
→ 16	
→ 16	
→ 14	

SMALL(): This function returns the Kth smallest value in a data set. You can use this function to select a value based on its relative standing. For example, you can use SMALL to return the lowest, second-lowest, or third-lowest value.

Syntax

7en

se

an

SMALL(array,k) Array is the array or range of data for which you want to determine the Kth smallest value.

K is the position (from the smallest) in the array or cell range of data to return.

	A	В
1	Data-1	Data-2
2	18	14
3	21	16
4	17	12
5	15	14
6	20	16

The year as followed 11

=SMALL(A2:A6,1)	>	15
=SMALL(A2:A6,3)	>	18
=SMALL(A2:A6,4)	>	20
=SMALL(A2:A6,2)	>	17
=SMALL(B2:B6,1)	>	12
=SMALL(B2:B6,2)	>	14
=SMALL(B2:B6,3)		14
=SMALL(A2:B6,6)	>	16
WALLEY WE REAL PROPERTY OF THE PARTY OF THE	N. C. C.	

CORREL(): This function returns the correlation coefficient of the array1 and array2 cell ranges. Use the correlation coefficient to determine the relationship between two properties. For example, you can examine the relationship between a location's average temperature and the use of air conditioners.

CORREL(array1, array2)

=DAT

=DA

=DA

=DA

=DA

=DA

=DA

DA

=D.

=D

If

M

AI

104

Array1 is a cell range of values. Array2 is a second cell range of values.

ion for the correlation coefficient is: The eq

quation for the	$\sum_{x} (x-x)(y-y)$
a WV T	$=\frac{\sum (x-x)(y-y)^2}{\sqrt{\sum (x-x)^2 \sum (y-y)^2}}$
Correl(A, I)	15 (x-x) Z
	V AND

		A	В	
	1	Data-x	Data-y	
	2	18	14	
1	3	21	16.	
l	4	17	12	
H	5	15	14	
-	6	20	16	

=CORREL(A2:A6,B2:B6) → 0.725907953

the month of the light of the state of the s

- DATE & TIME FUNCTIONS -

DATE(): This function is used to display a given date as per regional format You have to give a date as year, month, and day. If the cell format is changed to General, then excel will display serial number for the date. Default century is always 19 for this function.

=DATE(2024,11,7)	+	07-11-2024
=DATE(2024,10,15)	>	15-10-2024
=DATE(1994,12,25)	>	25-12-1994
=DATE(94,12,25)	-	25-12-1994

=DATE(09,8,15)15-08-1909

=DATE(1994,15,25) 25-03-1995 (Month 15 .: March of next year)

=DATE(2004,11,33) 03-12-2004 (Day 33 therefore 3 of December)

When you enter a date as a text value, Excel interprets the year as follows:

- 00 to 29: Excel interprets the two-digit year values 00 to 29 as the years 2000 to 2029. For example, if you type the date 15-08-29, Excel assumes the date is 15th August, 2029.
- 30 to 99: Excel interprets the two-digit year values 30 to 99 as the years 1930 to 1999. For example, if you type the date 15-8-30, Excel assumes the date is 15th August, 1930.

DATEVALUE(): Gives serial number for given date-text. Date-text means date in quotes.

```
I.-MS: SEM-II)
and the state of the state of
             Excel Basics, Calculations and Functions
             DATEVALUE("1-Jan-1900")
             DATEVALUE("1-Feb-1900")
             DATEVALUE("1-2-1900")
                                                                       105
             DATEVALUE("31-Dec-1900")
             =DATEVALUE("31-Dec-2023")
                                                 32
            DATEVALUE("31-Dec-23")
                                                 366
                                                45291
            *DATEVALUE(DATE(2023,12,31))
            pAY(): Gives day of the month for the given serial number or date-text.
            =DAY("27-12-2024")
                     → 1 (32 = 1-Feb-1900)
                                                       "YOUR STAFFISAD BUN
            =DAY(DATE(2024,12,31))
NEEL BARRE
            If cell A1 contains 15-Aug-2010 = DAY(A1)
anut and
                                                     (Nested Function)
           MONTH(): Gives month of the year for the given serial number or date-text.
           =MONTH("25-Dec-2024")
format.
                                                      (December : 12)
                                                  12
           =MONTH("27-12-2024")
anged to
ntury is
                                                  12
           =MONTH(32)
                                                      (32 = 1\text{-Feb-}1900)
           =MONTH(DATE(2024,12,31))
                                                      (Nested Function)
           If cell A1 contains 15-Aug-2010
           =MONTH(A1)
           YEAR(): Gives year for the given serial number or date-text. Answer of the
           function is numeric and it is always 4 digits.
           =YEAR("25-Dec-2024")
                                                   2024
          =YEAR("27-12-2024")
                                                   2024
                                                             (32 = 1 - Feb - 1900)
                                                   1900
          =YEAR(32)
                                                   2024
                                               +
          =YEAR("8/15/24")
                                                   1930
          =YEAR("8/15/30")
                                                   2029
                                               +
          =YEAR("8/15/29")
                                                    2024 (Nested Function)
          =YEAR(DATE(2024,12,31))
         If cell A1 contains 15-Aug-2024
                                                    2024
         WEEKDAY(): Gives day of the week for the given serial number or date-text.
         Answer of this function is numeric.
```

ear)

ber)

2000

late is

1930

ate is

date

```
MS-OFFICE (F.Y.B.Com.-MS: SEM-II)
     If return type is omitted or 1 then Sunday = 1, Monday = 2.....Saturday = 7.
                                                                      TIN
                                                                      TIM
                                                                      text !
                                        2 (Monday :: 2)
                                                                      TIN
                                        4 (Wednesday :. 4)
                                                                       #III
                                        3 (Nested Function)
                                        (Tuesday: 3)
                                   7
                                                                       III
                                                                       II
                                                MATEVALLE ELDVIEDO
                                       1 (Sunday : 1)
                                                                       III
                                       3 (Tuesday .. 3)
                                                                       10
                                       2 (Monday : 2)
   If return type is 2 then Monday = 1, Tuesday = 2 ......Sunday = 7.
                                       2 (Tuesday :: 2)
                                       1 (Monday :: 1)
  If return type is 3 then Monday = 0, Tuesday = 1 ......Sunday = 6.
                                       1 (Tuesday : 1)
                                       0 (Monday :: 0)
                    Monday = 1, Tuesday = 2, ...... Sunday = 7.
                   Tuesday = 1, Wednesday = 2, ...... Monday = 7.
                   Sunday = 1, Monday = 2, ..... Saturday = 7.
DAYS360(): Gives you, number of days between two given dates based on an
assumption that there are 360 days in a year i.e. 12 months of 30 days.
                                              30
                                              360
                                              720
                                              -360
                                              30 (Nested Function)
```

=T

NO

wi

SP

IF

pi

=DAYS360("1-Dec-2024","1-Jan-2025") =DAYS360("1-Dec-2024","1-Dec-2025") =DAYS360("1-Dec-2024","1-Dec-2026") =DAYS360("1-Dec-2025","1-Dec-2024") =DAYS360(DATE(94,8,15),DATE(94,9,15))

=WEEKDAY("31-Dec-2024")

=WEEKDAY("30-12-2024")

=WEEKDAY("1-Jan-2025")

≈WEEKDAY(DATE(2024,12,31))

If cell A1 contains 15-Aug-2010

=WEEKDAY("31-Dec-2024",1)

=WEEKDAY("30-12-2024",1)

=WEEKDAY("31-Dec-2024",2)

=WEEKDAY("30-12-2024",2)

=WEEKDAY("31-Dec-2024",3)

=WEEKDAY("30-12-2024",3)

Similarly, if return type is:

11 then

12 then

17 then

=WEEKDAY(A1)

TIME(): Gives time in hh:mm AM/PM form (12 Hour) for given time. You have to give the time as per 24 hour clock with hh,mm,ss.

=TIME(18,30,45)=TIME(12,0,0)

=TIME(6,34,54)

6:30 PM

12:00 PM

6:34 AM

MS: SEM-II) y=7.

Vallage

MATERIA

THACK

A Farm

CAOL

103VE

on an

excel Basics, Calculations and Functions =TIME(16,66,0)

TIMEVALUE(): This function is used to get serial number for time-text. Time

=TIMEVALUE("6:00") 0.75 =TIMEVALUE("12:00") 0.75

=TIMEVALUE("12:00 AM")

TODAY(): This function is used to get current date. Date will be displayed as Assuming today is 15th October, 2024

ASTE the formula at cell C2 will be NOW(): This function is used to get current date as well as current time. Date will be as per regional format and time as per 24 hours clock. There will be a

Assuming today is 15th October, 2024 and time is 6:30 in the evening. =NOW() → 15-10-2024 18:30

and formula at cell C2 wall be as follows:

- LOGICAL FUNCTION -

IF(): This function is used to check a condition, if a condition is true then true part of IF is solved otherwise false part of IF is solved.

=IF(condition, true, false)

AND(): This function is used to combine two or more conditions. If all the conditions are true then it will return True otherwise False.

OR(): This function is used to combine two or more conditions. If any one condition is true then it will return True otherwise False.

	A	Brank	CHM	or amore and in anyon -
1	GRADE	BASIC	HRA	Byntax
2	A	1000		ALGONIDE Semely
	В	4000		Search_value is the
1	B	5000	TO THE PARTY OF THE	smallest value then
7	1	3000	Tomas L	the filgnest value and
	1 2 3 4	2 A	1 GRADE BASIC 2 A 1000 3 B 4000	1 GRADE BASIC HRA 2 A 1000 3 B 4000 4 B 5000

ave

=AND(B2>500, B3>3000)

aride en les della

=AND(B2>800, B3 = 4000, B4 < 6000)

=AND(B2 < 500, B3 > 3000)

=OR(B2>500, B3>3000)

TRUE

TRUE

FALSE

TRUE

MS-OFFICE (F.Y.B.Com.-MS: SEM-II) TRUE → TRUE -OR(B2>800, B3 = 4000, B4 < 6000)FALSE =OR(B2 < 500, B3 > 3000)FALSE To find HRA as 10% of BASIC, if BASIC is above 3500, otherwise HRA is 12% of BASIC; the formula at cell C2 will be as follows:

If BASIC is 4000 or less then HRA as 9% of BASIC, otherwise HRA is 11% of BASIC; the formula at cell C2 will be as follows:

To find HRA as 10% of BASIC, if BASIC is above 3500 but less than 4500 otherwise HRA is 12% of BASIC; the formula at cell C2 will be as follows:

=IF(AND(B2>3500,B2<4500),B2*10%,B2*12%)

To find HRA as 10% of BASIC, if BASIC is below 3500 or basic is above 4500 otherwise HRA is 12% of BASIC; the formula at cell C2 will be as follows:

=IF(OR(B2<3500,B2>4500),B2*10%,B2*12%)

To find HRA as 10% of BASIC, if BASIC is below 1500, if basic is 1500 or above but less than 3400 then HRA is 12% of BASIC otherwise HRA is 14% of BASIC the formula at cell C2 will be as follows:

=IF(B2<1500,B2*10%,IF(B2<3400,B2*12%,B2*14%))

This example is of Nested If. [IF() within IF() is called as nested IF.]

Note: In all the above cases after entering the formula at cell C2; click at cell C2 and double click at fill handle to copy the formula for the rest.

- DATABASE (LOOKUP) FUNCTIONS -

VLOOKUP(): VLOOKUP stands for vertical look up. This function is used to search a value in the leftmost (first) column of the given range, and then returns a value in the same row from a column you specify in the function.

Syntax

VLOOKUP(search_value, range, col_number, [logical value])

Search_value is the value to search in a range. If search_value is less than smallest value then #N/A (ERROR) is returned. If search_value is greater than the highest value and logical value is TRUE then it uses the largest value in the first column of the range.

Range is the range of values where the function will work.

Col_number is the column number in the range from which matching value must be returned. If column number is less than 1 then #VALUE (ERROR) is

Escel Basics, returned. 1 then #REF # logical

must be inswer. It Logical V

approxim exact ma returned eract ma

values i Upperca Exampl

> 0/0 35

> > 60 75

Exam

To

=V Ex CO]

Ic

On

SEM-II) gscel Basics, Calculations and Functions returned. If column number is greater than the number of columns in the range If logical value is omitted or TRUE then values in the first column of the range pust be in ascending order; otherwise, vi.ookup may not give you correct answer. If logical value is FALSE then range does not need to be sorted. 2% of Logical value specifies whether you want VLOOKUP to search for exact match or approximate match. If TRUE or omitted, an approximate match is returned i.e. if exact match is not found, the next largest value that is less than search_value is 1% of

exact match. If logical value is FALSE then VLOOKUP will search for exact match. If exact match is not found then #N/A (ERROR) is returned. Values in the first column of the range can be text, numbers or logical values.

Uppercase and lowercase text is equivalent.

4500.

4500,

bove

SIC;

d to

ns a

an

han

the

lue

is

CAULA				
A		В		
3	0/0	Grade		
4	35	Pass Class		
5	45	Second Class		
6	60	First Class		
7	75	Distinction		

=VLOOKUP(66,A4:B7,2)

=VLOOKUP(82,A4:B7,2)

=VLOOKUP(33,A4:B7,2)

=VLOOKUP(66,A4:B7,2,TRUE)

=VLOOKUP(66,A4:B7,2,FALSE)

=VLOOKUP(60,A4:B7,2,FALSE)

=VLOOKUP(60,A4:B7,3)

=VLOOKUP(45,A4:B7,0)

First Class

Distinction

#N/A (ERROR)

→ First Class

→ #N/A(ERROR)

First Class

#REF(ERROR)

. → #VALUE(ERROR)

Example: 2

	A	В.	С	D	E	F	G
6		•	GRADE	BASIC	HRA	PF	NET
7			1	1000	150	80	1070
1			2	4000	600	320	4280
8			2	5000	750	400	5350
9			3		450	240	3210
10			4	3000	430		

To know HRA for grade 4, the function will be as follows:

450

Explanation: 4 is the value to search. C7:G10 is the range to search. 3 is the column number. (Notice that HRA is in 3rd column of the range). Logical value is

omitted therefore TRUE.

To know NET for grade 2, the function will be as follows:

=VLOOKUP(2,C7:G10,5)

MS-OFFICE (F.Y.B.Com.-MS: SEM.

68775

Frample:	3
----------	---

		B 10 DAYS	14 DAYS
16	TOUR	121000	165000 75000
17	EUROPE FAR EAST	58775	130000
19	MALDIVES MAURITIUS	68775 133335	168775
20	SWITZERLAND	133335	82000

=VLOOKUP("MAURITIUS",A17:C21,3) 58775 MALDIVES

=VLOOKUP("far east",A17:C21,2) =VLOOKUP("MALDIVES",A17:C21,1)

Explanation: The word SWITZERLAND is greater than the word ROME therefore to previous cell i.e. MAURITIUS because logical value is omitted

#N/A (ERROR) therefore TRUE. =VLOOKUP("ROME",A17:C21,2,FALSE)

Explanation: Logical value FALSE that means exact match, but exact match is not found therefore #N/A (ERROR).

Example 4:

Consider the following worksheet. Use VLLOKUP() to find Grade in column (by using a grade table given in F1:G5

		В	C	D	Ε	F	G
1	Name	%	Grade		and the second s	%	Grade
2	Smita	80				35	Pass Class
3	Anita	50		1		45	Second Class
4	Tania	60		*		60	First Class
5	Sancia	62				75	Distinction
6	Cathy	78					
7.	Vijaya	40					
8							

To find Grade by using VLOOKP

- Click at cell C2.
- Type the formula as

Click at cell C2 and drag the fill handle up to cell C7.

Ercel Basic Note: Ins the fill ha Alternati and pres

Imp. No value th either a

HLO searc sami

> If lo mus ans

(fi

Sy

· SEM.II gicel Basics, Calculations and Functions Note: Instead of dragging the fill handle in the last step, you can double click on the fill handle. Alternatively, you can first select the range C2:C7, then type the same formula and press Ctrl + Enter. Mote: If you are going to drag the VLOOKUP formula then for the search the cell reference must have relative reference and for range, you must use D % Name Grade 80 Distinction Smita Grade 50 Second Class Anita 35 Pass Class 60 First Class Tania 45 Second Class 62 First Class Sancia 60 First Class 75 Distinction 78 Distinction Cathy 3MOS 40 Pass Class Vijaya mittec/ HLOOKUP(): HLOOKUP stands for Horizontal look up. This function is used to search a value in the first row of the given range, and then returns a value in the same column from a row you specify in the function. is not If logical value is omitted or TRUE then values in the first row of the range must be in ascending order; otherwise HLOOKUP may not give you correct answer. If logical value is FALSE then range does not need to be sorted. Syntax mn (HLOOKUP(search_value, range, row_number, [logical value]) It is similar to VLOOKUP but it will search in the first row instead of leftmost (first) column. de D **SWITZERLAND** MAURITIUS B SS **MALDIVES** FAR EAST 133335 EUROPE 68775 Class 100000 TOUR 168775 58775 121000 82000 130000 10 DAYS SS 75000 165000 82000 14 DAYS on =HLOOKUP("MAURITIUS",B16:F18,3) 58775 =HLOOKUP("far east",B16:F18,2) MALDIVES =HLOOKUP("MALDIVES",B16:F18,1) 68775 Explanation: The word SWITZERLAND is greater than the word ROME, therefore to previous cell i.e. MAURITIUS because logical value is omitted =HLOOKUP("ROME",B16:F18,2,FALSE)

Fyplanation: I ogical value FALSE that means exact match, but exact match is not IPMT (rati Example: 80/0 P.a. a - FINANCIAL FUNCTIONS paid at t While using financial functions you will have to be sure that you are consistent the interest rate and the number found therefore #N/A (ERROR). this func While using financial functions you will have to be sure that and the number of about the units you use for specifying, the interest rate and the number of =PMT(8 Which r 20,276.3 loan an 12 ... periods. divide Annual Interest Rate by EMI the If payments are made divide Annual Interest Rate by Note: Monthly If the "term" is in Years, then to obtain the total number of periods, you have to ₹10,00. we wil multiply the years by the number of payments made in a year: loan a you gi multiply Years by =PM Monthly multiply Years by Note: Quarterly If you are making cash payment, then show them as negative numbers. If you inter are receiving cash, then show them as positive numbers. Alter PV: is present value that is value of investment or loan today. FV: is Future Value that is value of investment in future. nper: Number of periods, i.e. the total number of payment periods either in years, months, days etc. per: specifies the period of calculation (installment number) and must be in the range 1 to nper. Type: shows when payments are made- whether at end of period (0) or at the No beginning (1). Type can be either 0 or 1. If type is omitted, it is assumed as 0. Fo PMT(): Calculates the payment for a loan, based on constant payments and a constant interest rate. Syntax PMT(rate,nper,pv,[fv],[type]) PPMT(): Returns the payment on the principal for a given period for a investment based on periodic, constant payments and a constant interest rate.

IPMT(): Returns the interest payment for a given period for an investment base

on periodic, constant payments and a constant interest rate.

Syntax

PPMT(rate, per, nper, pv, [fv], [type])

m

syntax

41)

101

311

[PMT(rate,per,nper,pv,[fv],[type])

113

Example: From a bank you have taken a loan of ₹ 10,00,000 with interest rate at 8% p.a. and you are going to repay it in 5 years with monthly installments, to be paid at the end of each month. To know the monthly installment, you can use

=PMT(8%/12,5*12,1000000)

Which means you have to pay monthly installment of ₹ 20,276.39. This amount 20,276.39 includes principal amount as well as interest amount. You received loan amount therefore 10,00,000 is a positive amount and you will be paying EMI therefore 20,276.39 is a negative amount.

Note: In the above example we are assuming that we are taking a loan of ₹10,00,000; so, we will receive loan amount so 10,00,000 is a Positive amount and we will be paying EMI so, EMI amount is Negative. If you are giving loan then loan amount will be Negative and then EMI amount will be Positive, because if you give loan then you will receive EMI amount.

=PMT(8%/12,5*12,-1000000)

₹ 20,276.39

Note: As installments are monthly the interest rate has to be monthly therefore interest rate is divided by 12.

Alternatively, it can be calculated as follows:

84	▼, : >	√ fx	=PMT(B1/12	,B2*12,B3)	Formula
A. A.	A	В	С	D	
1	Rate of Interest	8%	6		
2	No. of Years		5		
3	Loan Amount	1000000			Angwo
4	EMI	₹-20,276.3	9		Answe

Note: You can calculate PMT with the help of calculator by using following Formula

$$P = \frac{c}{i} [1 - (1+i)^{-n}]$$

month


$$n = 5 \text{ years} = 5 * 12 = 60$$

Now if you want to know in the first monthly installment of ₹ 20,276.39, how much you are paying towards principal amount then the formula will be as follows:

Excel Basics, C. MS-OFFICE (F.Y.B.Com.-MS: SEM → ₹-13,609.73 =PPMT(8%/12,1,5*12,1000000)

=PPMT(8%/12,1,5*12,1000000)

So, in the first installment, out of 20,276.39 you are paying 13,609.73 towards interest. Initially the interest amount is more interest. o in the first installment, out of 20,276.39 you are principal and the rest towards interest. Initially the interest amount is more by gradually it will decrease. Alternatively, it can be calculated as follows: SPPMT(81/12,82,83*12,84) RATE(): I constant Pa Rate of Interest syntax Installment No. RATE(np No. of Years 1000000 Loan Amount ₹-13,609.73 To know how much you are paying towards principal amount in the secon installment, the formula will be as follows: ₹ -13,700.46 =PPMT(8%/12,2,5*12,1000000) In the second installment, out of 20,276.39 you are paying 13,700.46 toward principal and the rest towards interest. In the last installment (60th), principal amount will be calculated as follows: Note: 0.6 and EM ₹ -20,142.11 =PPMT(8%/12,60,5*12,1000000) will give Now if you want to know in the first monthly installment of ₹ 20,276.39, how much you are paying towards interest then you can find it out by subtracting the pv(): The principal of the principal of the pv(): The principal of the pv(): The principal of the pv(): The pv(): The pv() is the principal payment from the payment (20276.39 - 13609.73) or by the formula Syntax follows: PV (rate → ₹-6,666.66 =IPMT(8%/12,1,5*12,1000000) If you are going to make payments at the beginning of a month, then the formul will be as follows: ₹ -20,142.11 =PMT(8%/12,5*12,1000000,,1) Remember: PMT() = PPMT() + IPMT()NPER():It is used to find number of periods for an investment based on periodic constant payments and a constant interest rate. Syntax FV(): NPER(rate, pmt, pv, [fv], [type]) Synt To find period, if payment is 20276.39, loan amount is 10,00,000 and rate 0 FV(r interest is 8% p.a., the formula will be as follows: =NPER(8%/12,-20276.39,10000000) Exar Inter So, answer is 60 months = 5 years; answer is in months because rate of interes

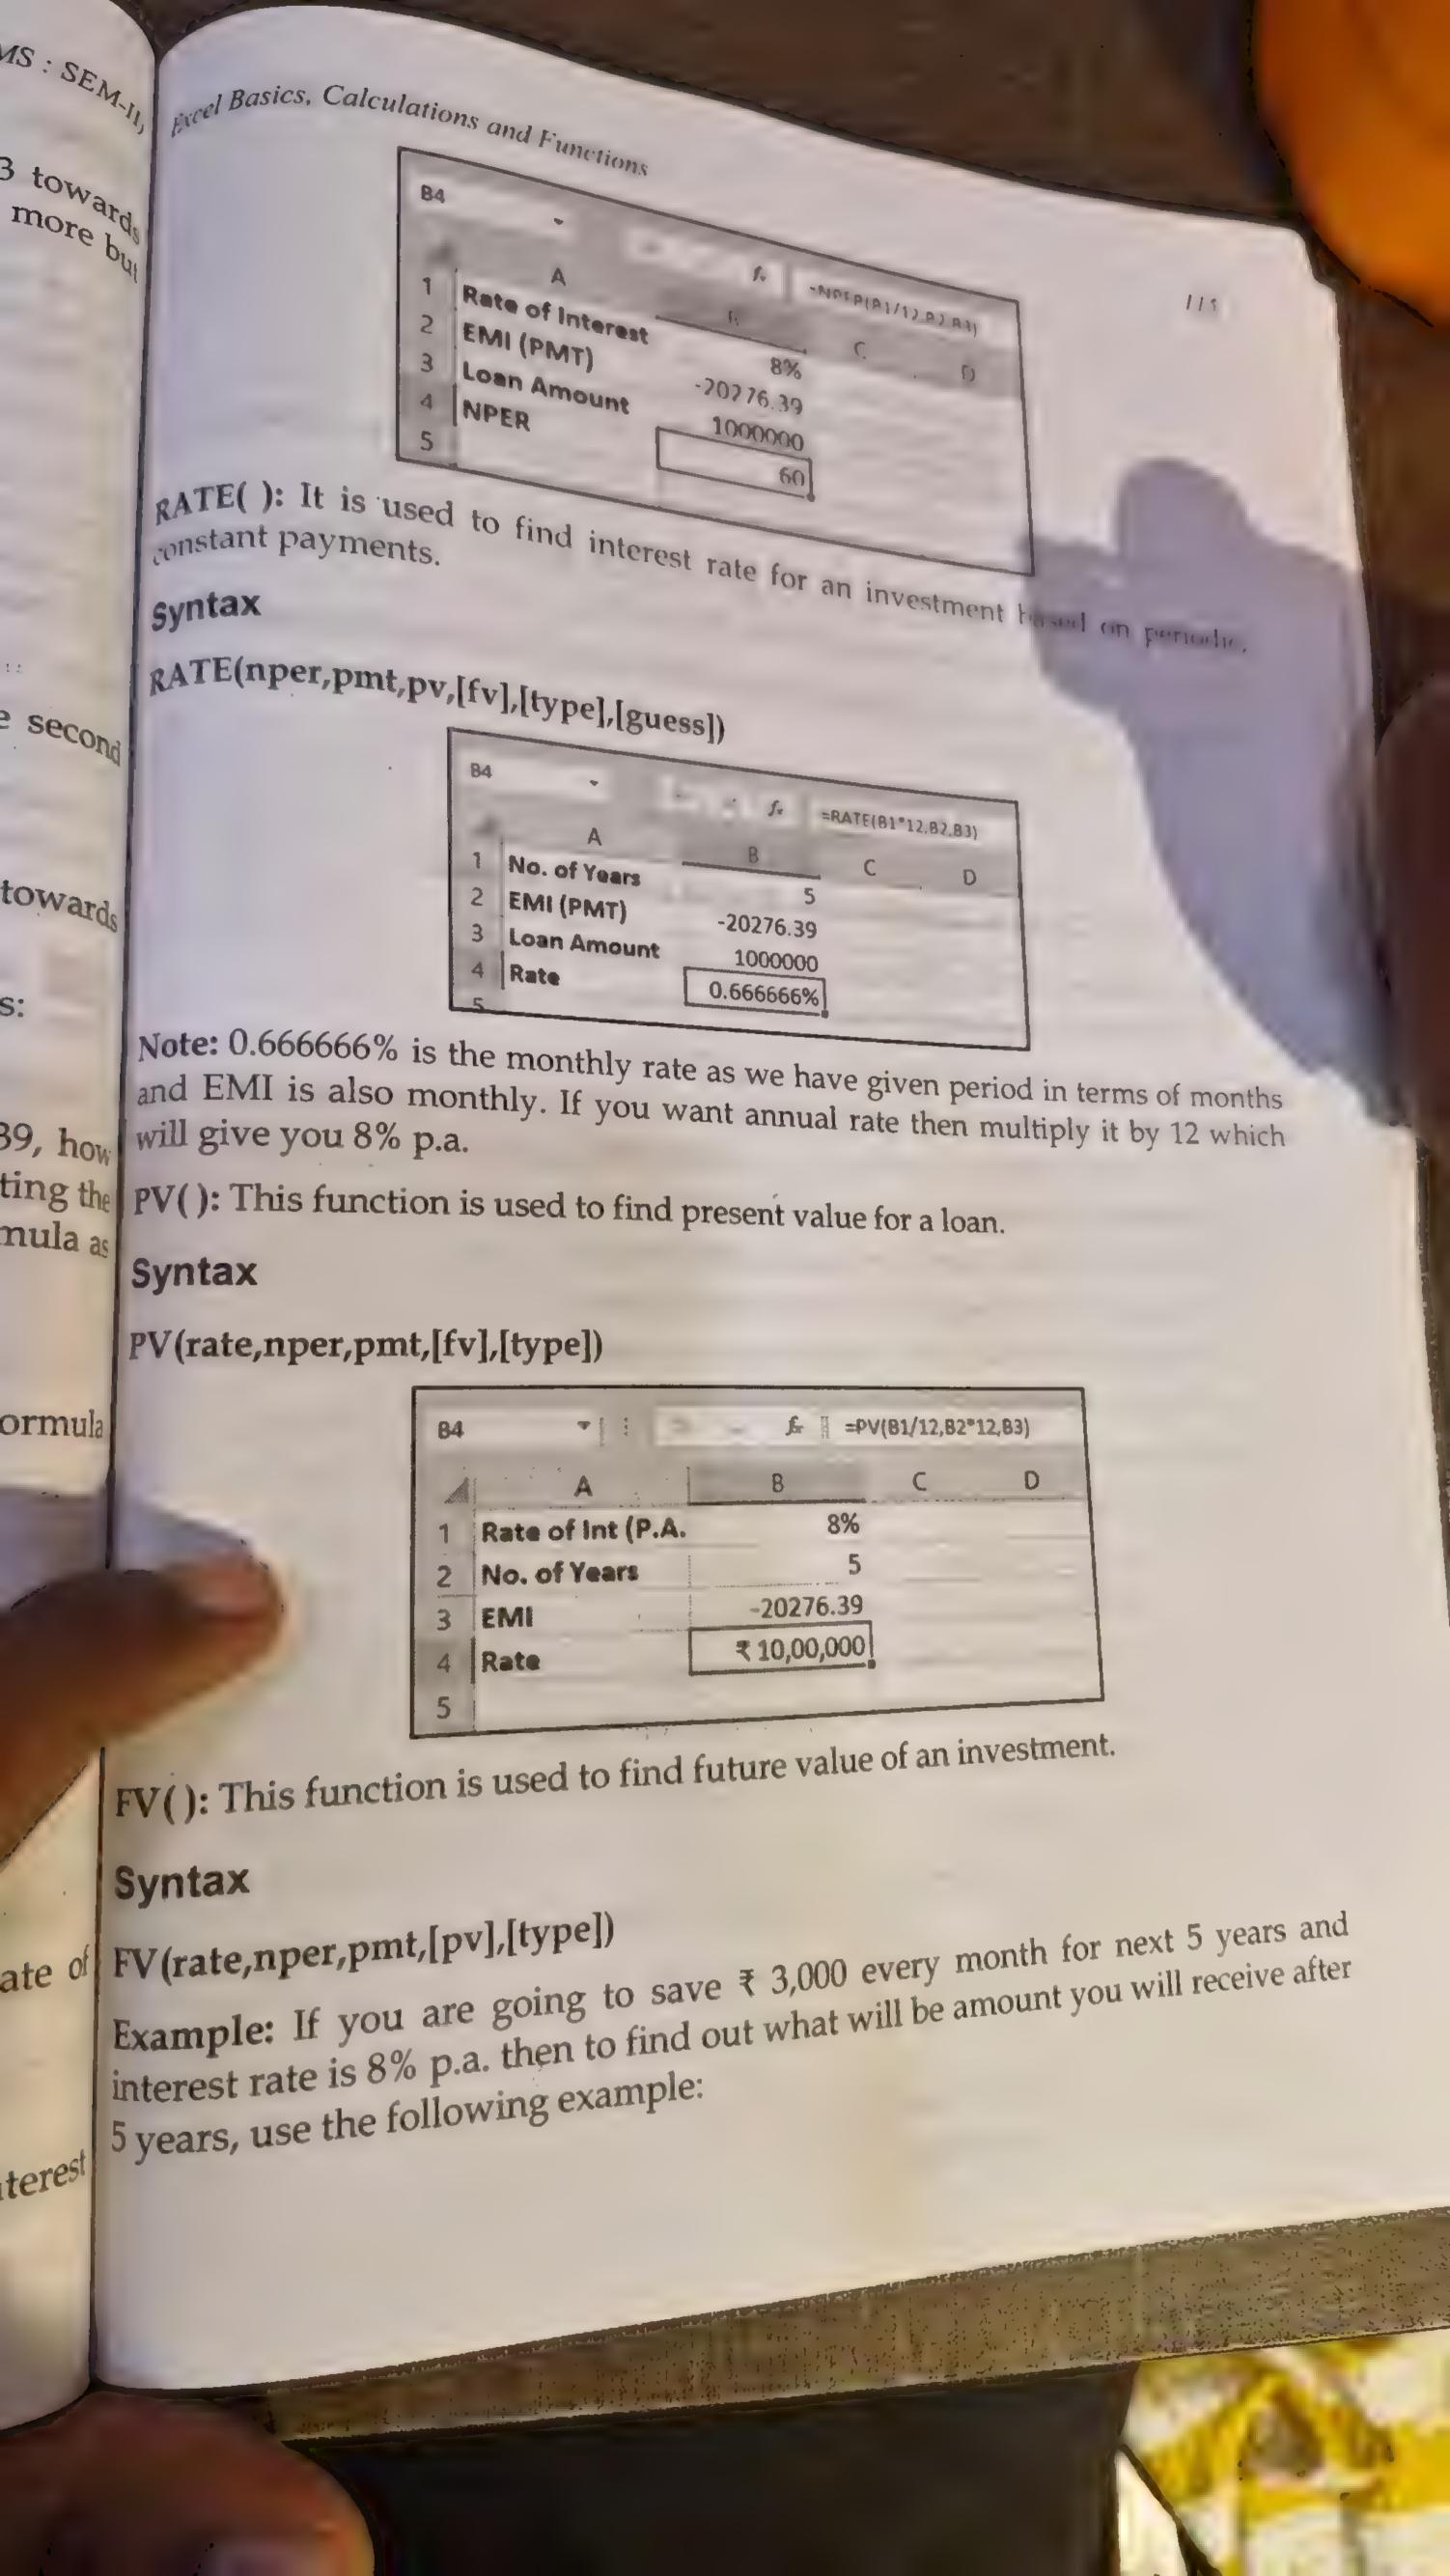

(2) 3 (MS-OFFICE (F.Y.B.Com.-MS: SEM-II) Answ (a) 3 Ansv 1111 Ans Monthly Saving Which means if you save \$ 3,000 every month for 5 years @ 8% p.a. then it will Ans Interest rate given is 8% p.a. and we want monthly interest rate as we are going (a) An to save every month so we have to divide 8% by 12. Period is 5 years but we are going to save monthly so 5 years will be multiplied (a) by 12 to make it monthly. (a) EXERCISE (a Multiple Choice Questions - Single correct answer: ____ reference. A cell reference \$A\$1 is known as __ (2 (a) Relative (b) Absolute (c) Mixed (d) None of These A cell reference \$A1 is known as _____ reference. (a) Relative (b) Absolute (c) Mixed (d) None of These A cell reference A\$1 is known as _____ reference. (a) Relative (b) Absolute (c) Mixed (d) None of These A cell reference A1 is known as _____ reference. 24. 4. (a) Relative (b) Absolute (c) Mixed (d) None of These ___ key is used to change the cell reference from Relative to Absolute to Mixed. 25. 5. (a) F2 (b) F3 (c) F4 (d) F5 RIGHT() is a _____ function. 26. (a) Text (b) Mathematical (c) Statistical (d) Logical 7. FIXED() is a _____ function. 27. (a) Text (b) Mathematical (c) Statistical (d) Logical Which function is used to find length of a string? 8. 28. (a) LENGTH() (b) LEN() (c) COUNT() (d) None of These Answer of =ABS(-7.3) will be 9. 29 (a) 7.3 (b) 7 (c) -7.3 (d) -7 10. Answer of =ABS(7.3) will be ____ (a) 7.3 (b) 7 (c) -7.3 (d) -7 30 11. In Excel =SQRT(16) will return _____ 12. In Excel =SQRT(-16) will return ____ (a) 4 (b) -4 (c) ±4 (d) ERROR

MS: SEM Excel Basics, Calculations and Functions Answer of =MOD(23,5) will be _ (a) 3 (b) 4 (c) 5 (d) None of These Answer of =MOD(5,23) will be (a) 3 (b) 4 (c) 5 (d) None of These 117 Answer of =MOD(20,5) will be (a) 3 (b) 4 (c) 5 (d) None of These then it Answer of =INT(5.7) will be (a) 5 (b) 6 (c) 7 (d) None oof These are goi Answer of =INT(-5.7) will be (a) -5 (b) -6 (c) -7 (d) None oof These multiply Answer of =ROUND(76.543,2) will be _ (a) 77 (b) 76.5 (c) 76.6 (d) 76.54 Answer of =ROUND(76.543,1) will be (a) 77 (b) 76.5 (c) 76.6 (d) 76.54 Answer of =ROUND(76.543,0) will be ____ 20. (a) 77 (b) 76.5 (c) 76.6 (d) 76 Answer of =ROUND(76.543,-1) will be ___ (a) 70 (b) 80 (c) 77 (d) ERROR Answer of =ROUND(76.543,-2) will be ____ 22. (a) 70 (b) 80 (c) 100 (d) 0 23. Answer of =ROUND(76.543,-3) will be ____ (a) 70 (b) 80 (c) 100 (d) 0 Answer of =ROUNDDOWN(76.543,2) will be (a) 75 (b) 76.55 (c) 76.53 (d) 76.54 Answer of =ROUNDDOWN(76.543,1) will be ____ Mixed. (a) 76.4 (b) 76.5 (c) 76.6 (d) 76.3 Answer of =ROUNDDOWN(76.543,0) will be ____ 26. (a) 77 (b) 76 (c) 75 (d) 70 Answer of =ROUNDDOWN(76.543,-1) will be ____ (a) 70 (b) 80 (c) 76 (d) 75 Answer of =ROUNDDOWN(76.543,-2) will be ____ (a) 70 (b) 80 (c) 100 (d) 0 Answer of =ROUNDDOWN(76.543,-3) will be ____ (a) 70 (b) 80 (c) 100 (d) 0 Answer of =ROUNDUP(76.543,2) will be ____ (a) 77 (b) 76.55 (c) 76.53 (d) 76.54 30. Answer of =ROUNDUP(76.543,1) will be ____ (a) 76.4 (b) 76.5 (c) 76.6 (d) 76.3 31.

MS-OFFICE (F.Y.B.Com.-MS: SEM.II,

BY

	Insert of -ROUNDUP (76.543,0) will be
1	DOLINDLIP (76.54.5,0)
	TOI - ROLLING
-	Answer of -ROUNDUP (76.543,-1) will be Answer of -ROUNDUP (76.543,-1) will be
	(b) (c) (c) (76.543,-1)
	OI - ROUNI'C
; ;	Answer of =ROUNDUP(76.543,-2) will be
	(b) 80 (c) 76 (c) WIII 65
	- FROUNDUI (VOI
1	man et of -100 (d) 0
	-1 -0 (b) 80 (c) 100 (d) will be
	Answer of = ROUNDUP(76.543,-3) will be Answer of = ROUNDUP(76.543,-3) will be
	Answer of = KCO
	(d)
	(a) 1000 (b) 80 (c) 100 (d) 0 will be
	(a) 1000 (b) 80 (c) 100 (c) Answer of =FLOOR(15.5,4) will be
٠	4nswer 6.
	() 15 (b) 16 (c) 12 (a) 13
	(a) 15 (b) 10 (c) will be

37 Answer of =FLOOR(14,4) will be _____ (a) 15 (b) 16 (c) 12 (d) 14 (a) 15 (b) 16 (c) 12 (d) 14

38. Answer of =CEILING(15.5,4) will be _______

(a) 15 (b) 16 (c) 12 (d) 14

39. Answer of =CEILING(14,4) will be _____ (a) 15 (b) 16 (c) 12 (d) 14

40. Which function is used to count number of cells that contains numbers?

(a) COUNT() (b) COUNTA() (c) COUNTN() (d) None of these

Which function is used to count number of cells that are not empty?

(a) COUNT() (b) COUNTA() (c) COUNTN() (d) None of these

42. You are given that, 20-October-2024 is Sunday. What will be the answer of =WEEKDAY("20-October-2024")?

(a) Sunday (b) Sun (c) 1 (d) 7

43. You are given that, 20-October-2024 is Sunday. What will be the answer of =WEEKDAY("20-October-2024",1)?

(a) Sunday (b) Sun (c) 1 (d) 7

44. You are given that, 20-October-2024 is Sunday. What will be the answer of =WEEKDAY("20-October-2024",2)?

(a) Sunday (b) Sun (c) 1 (d) 7

45. Which function is used to find EMI of a loan?

(a) EMI() (b) PMT() (c) PPMT() (d) PV()

46. PV() is used to find _____ Value.

(a) Positive (b) Present (c) Past (d) Particular

B. State whether the following statement are True/False:

- 1. User can delete all the worksheets from a workbook.
- User can change name of a worksheet.
- 3. User can change the sequence of the worksheets.
- 4. User can add new worksheets to a workbook.

 5. User can delay.
- 5. User can delete a sheet from a workbook.

SEM-III ficel Basics, Calculations and Functions By-default, LEFT() gives one character from the left side. TRIM() is used to remove only leading blank spaces from a string. 119 A function =LEN("F.Y.BMS") will return answer as 5. 8. In Excel there is a function called TODAY(). 9. 10. NOW() gives you only Current time. 11. IF() is a logical function. 12. PPMT() + IPMT() = PMT()13. Questions on Excel Calculations: C. Calculate total, average, highest & lowest for the following worksheet. 1. 1 Indiana Sales D Product Jun Splendor Plus 3 Jul Aug 7887000 5050500 67849000 Unicorn 56 2299000 4879900 67404000 TOTAL 57 **AVERAGE** 58

2. Product description, opening stock qty., purchase qty & sales qty has been entered in first four columns and from row number two to row number thirty-one. First row is used for column headings. Calculate the closing stock assuming that the column heading for closing stock is already entered.

Name of the students and the marks scored by them in 4 different subjects are entered in the worksheet from A2 to cell E52 out of which the first row contains the column headings and the other rows contain the data. Find total, average of marks and special average in the column F, G and H respectively. Give your own column headings for these three columns. Special average is average of best three marks.

4. Calculate selling price.

59 HIGHEST

60

er of

er of

LOWEST

a	icula	le seming p		C	D	
		A	В			
	1	Description	Unit Cost	Selling Price		-
Ī			150			1
l	2	Prod - A	:			-
I	:	:				1
	:					
ı		Prod - x	550			
	16	1100			-	
	:				18	%
	:		-		10	
Ì	49	Profit on Cost				

13.

Calculate following bill.		C	D
Calculate	B My Stores	Quantity	Total
1 2 Description	Price	550	
3 Prod - A		:	
	:	200	
46 Prod - x	588	Total	
47		all A2 to cell	C55, 01

Name, Grade and Basic Salary is typed in cell A2 to cell C55, out of which first row 12.

contains headings. Calculate the following: 1. DA is 10% of basic salary subject to minimum of ₹ 200.

1-11

PF is 8.33% of basic salary or Rs 125 whichever is minimum. NET is BS + DA- PF; it should be rounded off to nearest upper 10.

Name & basic salary of 100 employees are entered in first two columns. The first row contains the column headings calculate HRA, DA, MA, & GROSS. HRA is 139 of basic salary or ₹ 200 whichever is less. DA is 42% of basic salary subject minimum of ₹ 1000. MA is 18% of basic salary subject to minimum of ₹ 1000 and subject maximum to of ₹10000. Gross = Basic salary + HRA +DA + MA. Gross salar must be rounded off to nearest ten.

Name, amount, interest rate and period are entered in cell A3 to cell D89. Calculate 14. simple interest and compound interest in column E & F. Simple Interest= PNR/100 and Comp. Int.=P (1 + R/100)ⁿ - P. First row contains title whereas second row contains column headings.

Calculate marks out of 60 and out of 100 in column C & D for the following 2 worksheet.

	A	В	С	D
1	NAME	Marks out of 40	Marks out of 60	Marks out of 100
2	Lucas	34		
:				
*		:		
60	Fredrick	.: 32		

Calculate simple and compound interest for the foll

	A	bund interest for B	C		
1	NAME	AMOUNT		D	E
2	PHILIP		RATE	S.INT.	C.INT
•		10000	10.5		
	•				
	•		•		
0	RAYMOND	2000			
1		290000	13		
2	PEDIOD				
	PERIOD (Years)	7			

111-111 Excel Basics, Calculations and Functions Consider following worksheet 1 Worker 121 ABC Constructions Ltd. 2 Monthly D Name 3 Basic Alment 4 Propent DAVS Propertionate Days "alary 59 Assume 25 working days in a month. t ron Type a series 2,4,6,....20 in cell A1 to A10 and then find the total of their squares in 12. Calculate depreciation by using SLM for each year. 13. B COST firs. DEP. RATE (%) D 100000 NO. OF YEARS YEARS DEP. 10 3 4 2 5 3 6 4 ulate Calculate depreciation by using SLM for each year. 5 14. /101 B row DEP. RATE COST 1 NO. OF YEARS 100000 10% Wing 5 3 YEARS 1 4 3 4 DEP. 5 Cost of an asset is typed in cell A2, Rate of depreciation is typed in cell A4. Calculate 15. depreciation by using Written Down Value method for each year for first 5 years. Calculate depreciation by using SLM & WDV for each year. 16. F E D A NO. OF YEARS DEP. RATE COST 5 10.25% 200000 4 3 2 1 **YEARS** SLM-DEP. Cost of an asset is typed in cell B2, Life of an asset in years is typed in cell B3 and scrap value is typed in cell B4. Calculate depreciation for first 4 years. Cost of an asset is typed in cell D1, Life of an asset in years is typed in cell D2 and scrap value is typed in cell D3. Calculate depreciation by using WDV method for 18. first 4 years.

HR

Ba!

26.

28

70.2 Calculate depreciatio	on by using SI	M and WDV	of an asset for	each year	F
A	В	Xyz. Ltd.	YEARS	DEP.	W.D.V
2 COST 3 DIP RATE(%) 4 NO OFYFARS	100000		1 2 3		
			5		R3 Cal

- Cost of an asset is typed in cell B2, Rate of depreciation is typed in cell B3. depreciation by using Written Down Value method for each year as well as WDV of
- You are given cost of an asset and rate of depreciation. Show serial number for the year and depreciation by WDV for first 8 years. Use your own cell references.
- Calculate HRA, PF and Net Salary for following worksheet in column D, E and F respectively.

spectr	vely.		C
1	A	В	
1	HRA RATE	10%	
2	PFRATE	8.33%	
3	NAME	DEPT.	SALARY
4			
:			
•			
55			
			1 (11

23. Consider following worksheet and calculate the following

	A	В	C .	D	E
1	2000000	Loan Amt.			
2	11%	Rate P.A.			
3	10	Years (Monthly	Installments)		

Calculate Monthly payment amount of loan in cell D1, Principal payment for 3rd installment in cell D2 and Interest payment for last payment in cell D3.

- Write only formulas for the following: Assume basic salary is typed in cell B1. 24.
- HRA is 10% of basic if basic is above 10,000 otherwise HRA is 12% of basic. (a)
- HRA is calculated as follows: (b)

Basic Salary		HRA
< 5,000	ı	10%
>= 5,000 but < 7,500		12%
>= 7,500		15%

HRA is calculated as follows: (c)

D 1 0 1		
Basic Salary	1 , ,	HRA
>=10,000		10.5%
<10,000 but >=8,	000	11.25%

Excel Basics, Calculations and Functions < 8,000 but >= 5,000< 5,000 12% HRA is calculated as follows: 15% 123 (d) Basic Salary HRA First 8,000 10% Next 5,000 12% Rest/ Excess HRA is 10% of basic salary if basic salary is above 4,000 but below 7,500 otherwise (e) HRA is 11% of basic salary if basic salary is below 5,000 or above 8,500 otherwise (f) Name, Grade and Basic Salary is typed in cell A2 to cell C55, out of which first row 25. HRA is 10% if Grade is 'A' otherwise 12%. 1. DA is 10% of basic salary subject to minimum of ₹ 200. MA, for Grade 'A' is 15%, for grade 'B' it is 13% otherwise it is 10%. 3. PF is 8.33% of basic salary or ₹ 125 whichever is minimum. 4. NET is BS + HRA + DA + MA - PF; it should be rounded off to nearest upper 5. 10. Also find total net salary payable to Grade 'A' employees in cell A58. Calculate average of marks and result in column D and E respectively. A student is 26. declared as PASS if he gets 40 or more marks in each subject and the average of marks is 50 or more otherwise, he is declared as FAIL. Name of all the students is typed in cell A2 to cell A51, their marks in two subjects are typed in cell B2 to C51. Name of the students and the marks scored by them in 4 different subjects are entered in the worksheet from cell A2 to cell E52 out of which the first row contains the column headings and other row contains data. Find Result. A student is declared as Pass if he gets 35 or more marks in each subject otherwise Fail. Also find total number of Pass students and total number of Fail students in cell A55 and A56 respectively and give proper headings. Name of the students and the marks scored by them in 4 different subjects are

entered in the worksheet from cell A2 to cell E52 out of which the first row contains

the column headings and other row contains data. Find Result. A student is

declared as Fail if he gets less than 35 in any subject otherwise Pass. Also find total

number of Pass students and total number of Fail students in cell J1 and J2

Name of the students and the marks scored by them in 6 different subjects are

entered in the worksheet from cell A2 to cell G66 out of which the first row contains

the column headings and other row contains data. Find Result. A student is

declared as Pass if he gets 35 or more marks in each subject, if a student is Pass in 4

or more subjects, then ATKT otherwise Fail. Also find total number of students in

respectively and give proper headings.

each category of result.

II)

te

)f

MS-OFFICE E

D 124 30. Consider following worksheet: Hi-Tech Library Fine A Return Issue Amount Date Book Date Members 2 Name Name 3

Fine is ₹ 2 per day for excess over 10 days. Also find Total fine amount. Name of ten employees and their basic salary is entered in cell A2 to B11. First row Name of ten employees and their basic salary is entered schedule in column C and contains column headings. Calculate Tax as per following schedule in column C and

education cess in column D. Education cess is 10% on Tax.

	Tax
Basic Salary	Nil
First 4500	7%
Next 3500	10%
Rest	

sider following worksheet:

2.	Cons	sider following	WOINDARD	C	D	E
		A	В			
	1	Hi	-Tech Company Ltd	1.		
1	2	Employee	Monthly			
	3	Name	Salary			
1	4	:				
	*					
2	55	*	:			

Calculate monthly income tax in column C as per the following schedule:

Annual Salary	Income Tax
First 1,80,000	Nil
Next 1,20,000	10%
Next 1,00,000	20%
Excess	30%

Also find total number of employees where monthly salary is above 10,000.

Name of the salesman and his sales are entered in cell A1 to cell B20. First row 33. contains headings. Calculate commission, additional commission and total commission. Commission is 8% of sales. If sales exceed ₹ 35,000 then an additional commission of 3% of sales exceeding ₹ 35,000 is given. Also find Total of total commission.

W

nd

tal

nal

otal

Consider following workshe

2	Name			C	D	
3	ivanie	Hou	rly.Rate	ABC Ltd.		E
3	:		TA Kafe	Hrs.Worked	D	-
:	*		-	:	Reg Pay	OT. Pay
54	1:	•				

overtime. Overtime is paid at double of the normal rate. sidered as regular hours. Hours exceeding 35 is considered as

Consider following worksheet: 35.

	A		
1	Mumba	i Traffic Police	C
2	Parking Violations		
3	1	Action To Be Taken	
4	3	Polite Warning Letter	
-	1	Strong Warning Letter	
5	7	Collect Fine	
6	6	Revoke Licence	
7			
8			
9	Name	No of Parking Violations	Action
10			
:			
30			

Table showing the actions to be taken for parking violations is given in cell A2:B6 Name and Actual parking violations are typed in cell A10 to cell B30. Find the action based on the table given using VLOOKUP.

Consider the following worksheet:

5. Con	sider the follows		C	D	E
	A	В	C		
1		1	Red Hat Co. Ltd		DONILIS
1		Grade	HRA	DA	BONUS
2		A	7000	12000	20000
3		A		13000	15000
4		В	5000	15000	25000
		C	3000		30000
5		D	1000	18000	
6					
7					PONILIC
8			TIDA	DA	BONUS
0		Grade	HRA		
9	Name				
10		•			
•					
50		·			

126

Calculate HRA, DA & BONUS using VLOOKUP function.

37 D	Display proper messa	ge and calculate	C	D	
	1 A		Super Market Sales Price	Message	Difference
	2 Prod. Name	Pur. Price	12000		
3	Prod-A Prod-B	15000	12000		
-					

Message can be 'At Profit' / 'At Loss' / 'At Cost'.

Message can be At Holl, Message and Messag

Con	ISIDEL TOHOUTE	В	С	D	
-	A		Share Market		O/ finance
2	Co. Name	Face Value	Issue Price	Message	% of issue
3	Co. Italia	Per Share	Per Share		Price on FV
4	Bata	10	80		
:	:	:			
54	:	:	:		

Message can be 'At Par' / 'At Discount' / 'At Premium'.

39. Consider following worksheet, Calculate Discount and Net amount:

	A	В	С	D	E
1			Inorbit Mall		
2	Name	Pur. Date	Pur. Amt.	Discount	Net Amt
3	:				
:	:	:	*		
54	:	:			

Discount depends on day of the week; on Thursday discount is 15%, on Saturday and Sunday Discount is 10% otherwise discount is 4%.

- 40. Name of the employees is typed in cell A1 to cell A50. First row is used for column heading. Display first character of name, last 3 characters of name, 3rd & 4th character of name and length of name in column B, C, D & E respectively. Give column headings.
- 41. Name of the salesman and his sales are entered in cell A1 to cell B20. First row contains headings. Calculate commission.

Sales	Commission
<=10000	5%
>10000 but <=25000	10%
>25000	15%

Calculate custom duty for the foll 42.

	Tot th	ne following:
1	A	R
1	NAME	C
2	Ajay Save	DATE GOODS VALUE
:		13-Dec-2012 GOODS VALUE
		3900
51		
31		
nical a	201	

127

A typical customs regulation has the following policy of collecting customs duty. Any passenger coming from any foreign country is allowed to bring goods worth ? 1,250 free of duty. For the next ₹ 1,000, the duty charged is 170%, and for the excess

43.

	A	В	
1		F.Y.B.Sc.	C
2	NAME	Physics	
3	Suhas Shinde	70	Maths
:			68
64			

The students have to appear for two subjects Physics and Mathematics. If a student gets 40 or more marks in both the subjects then result is 'Pass'. If he fails in Physics but gets 60 or more marks in Mathematics then result is 'ATKT-Physics'. If he fails in Mathematics but gets 55 or more marks in Physics, then result is 'ATKT-Maths'. Otherwise, result is 'Fail'. Find result for the above worksheet. Also find number of students in each category of result.

Calculate average of marks, result and grade in column D, E and F respectively. 44. Name of 10 students is typed in cell A2 to A11 and their marks in two subjects are typed in cell B2 to C11. First row contains headings. A student is declared as PASS, if he gets 35 or more in each subject otherwise FAIL. For a FAIL student grade is 'IV' and for a PASS student grade is calculated as follows.

Average	Grade
Average >=60	I
Average <60 but >=45	II
Average <45 but >=35	III

Answers:

$$MCQs$$
: (1) - (b), (2) - (c), (3) - (c), (4) - (a), (5) - (c), (6) - (a), (7) - (a), (8) - (b), (12) - (c), (14) - (c), (15) - (d), (16) - (a), (16) - (a), (17) - (a), (18)
$$MCQs: (1) - (b), (2) - (c), (3) - (c), (4) - (a), (5) - (a), (14) - (c), (15) - (d), (16) - (a), (9) - (a), (10) - (a), (11) - (a), (12) - (d), (13) - (a), (14) - (c), (15) - (d), (16) - (a), (17) - (a), (17) - (b), (18) - (c), (18) - (d), (18) - (d)$$

$$(9) - (a), (10) - (a), (11) - (a), (12) - (a), (13) (a), (22) - (c), (23) - (d), (24) - (d),$$

 $(17) - (b), (18) - (d), (19) - (b), (20) - (a), (21) - (b), (22) - (b), (31) - (c), (32) - (a),$

$$(17) - (b), (18) - (d), (19) - (b), (20) - (d), (21) - (c), (21)$$

$$(33) - (b), (34) - (c), (35) - (a), (36) - (b), (46) - (b)$$

$$(33) - (b), (34) - (c), (35) - (a), (36) - (b), (46) - (b)$$

 $(41) - (b), (42) - (c), (43) - (c), (44) - (d), (45) - (b), (46) - (b)$

False: 1, 7, 8, 9, 11



SORTING DATA

Céminond Data Tab > Soit (OR) Home Lab > Soit & Filter > Custom Cont








User This option is used to sort current range of data in ascending or descending order.

Dialog Box:

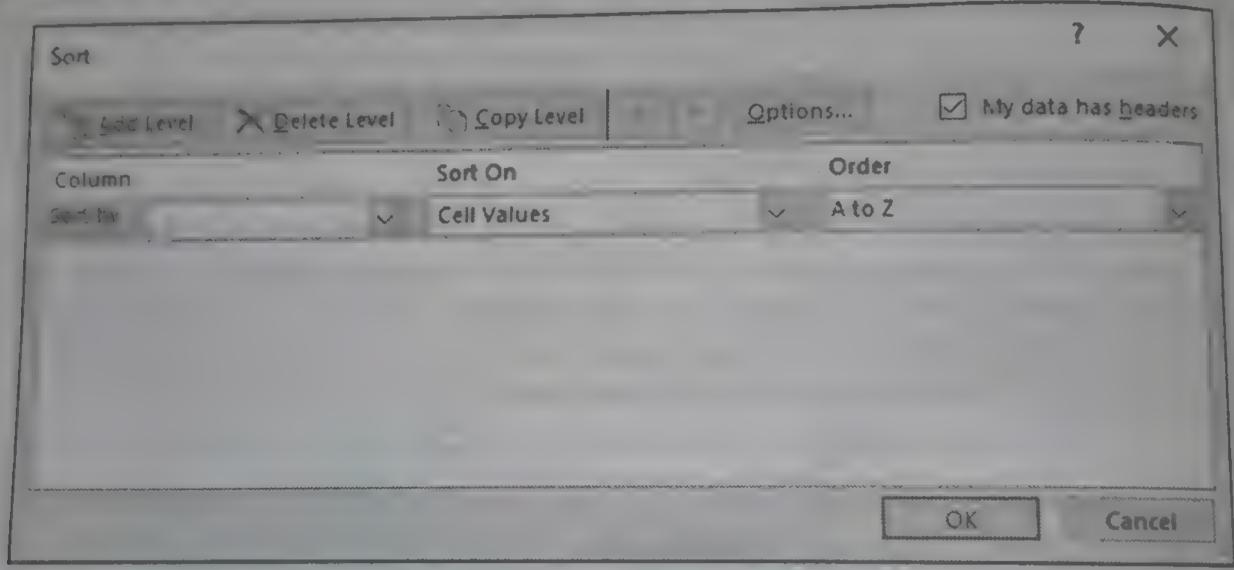

HOW TO SORT THE DATA?

Click anywhere in a data (OR) Select an entire data.

Click at Data Tab→ Sort (OR) Click at Home Tab→ Sort & Filter → Custom Sort

- Select 'My data has headers' or deselect 'My data has headers' as the case may be.
- Click at the Drop-down arrow of 'Sort by', select sorting key.
- Click at Drop-down arrow of Order select A to Z/ Z to A in case of Text column (or) select Smallest to Largest/ Largest to Smallest in case of Numeric column (or) select Oldest to Newest/ Newest to Oldest in case of Date column.

If required, click at Add Level, this will add a row of 'Then by' Click at the Drop-down arrow of 'Then by', select sorting key

Click at Drop-down arrow of Order select A to 14 1/16 A diameter of the column (or) select Smallest to Targest/ Pargest to Smallest in case of Numeric column (or) select Oldest to Newport / Newport to Oldest in case of Pate column [Repeat these 3 steps as long as you want] Click at Ok button.

129

TIPS:

rt

ng

e

- If the first row of your data does not contain headings, then you should deselect My data has headers then 'Sort by' key should be column position i.e. Column A or Column B etc.
- Sorting is possible maximum up to 64 fields. (b)
- While sorting if two or more values are exactly the same then first come first (c) principal is adopted.
- Whenever you click at Add Level button, Excel will add one 'Then by' line (d) in the dialog box as follows:

Then by Values A to Z

If required 'Then By' can be removed by clicking at Delete Level button; at a time one 'Then by' is removed.

Note: For sorting data should be available in columnar format, with or without column headings.

Consider the following worksheet and sort the data in the descending order of Marks.

	A	В	C
1	NAME	SURNAME	MARKS
	SANJAY	D'SOUZA	451
2	GIRISH	PATIL	462
3		D'SOUZA	453
4	SUDHIR	SHAH	489
5	POOJA	SHAH	450
6	ARCHANA	KAMAT	486
7	NILAM		455
8	AMITA	KAMAT	46
Q	YOGESH	PATIL	

To sort the data in the descending order of Marks

Click anywhere in data (OR you can select entire data)

(69)

Cli

F

9

5.

6.

FI

H

Select My data has headers; if not selected. Cink and The Art of Gort by', select MARKS CIRCLE TOW OF CASE AND Relect Largest to 'man

Estable of the Alexander of the Alexande Circle Descriptione.

To the transfer of the control of th Chile Data Tab > Soit (OR) Chik at Home Tab > Sort & Filter > Custon Sort

- Select My data has headers; if not selected.
- Circle at Drop-down arrow of 'Sort by', select SURNAME
- Click at Drop-down arrow of Order and select A to Z (Ascending).
- Click at Add Level button to add 'Then by'. Cack at Drop-down arrow of 'Then by', select NAME
- Click at Drop-down arrow of Order and select A to Z (Ascending).
- Click at Ok button.

QUICK SORT


If you want to sort the data on only single column then you can use quick sort.

How to perform Quick Sort

- Click on a data cell, from the column on which you want to sort the data.
- icon Click at Data Tab > Ascending Descending icon (OR)

Click at Home Tab > Sort & Filter > Ascending Icon / Descending Icon Consider the following worksheet. Sort the data in the descending order or Marks.

	A	В	C
1	NAME	SURNAME	MARKS
2	SANJAY	D'SOUZA	451
3	GIRISH	PATIL	462
4	SUDHIR	D'SOUZA	453

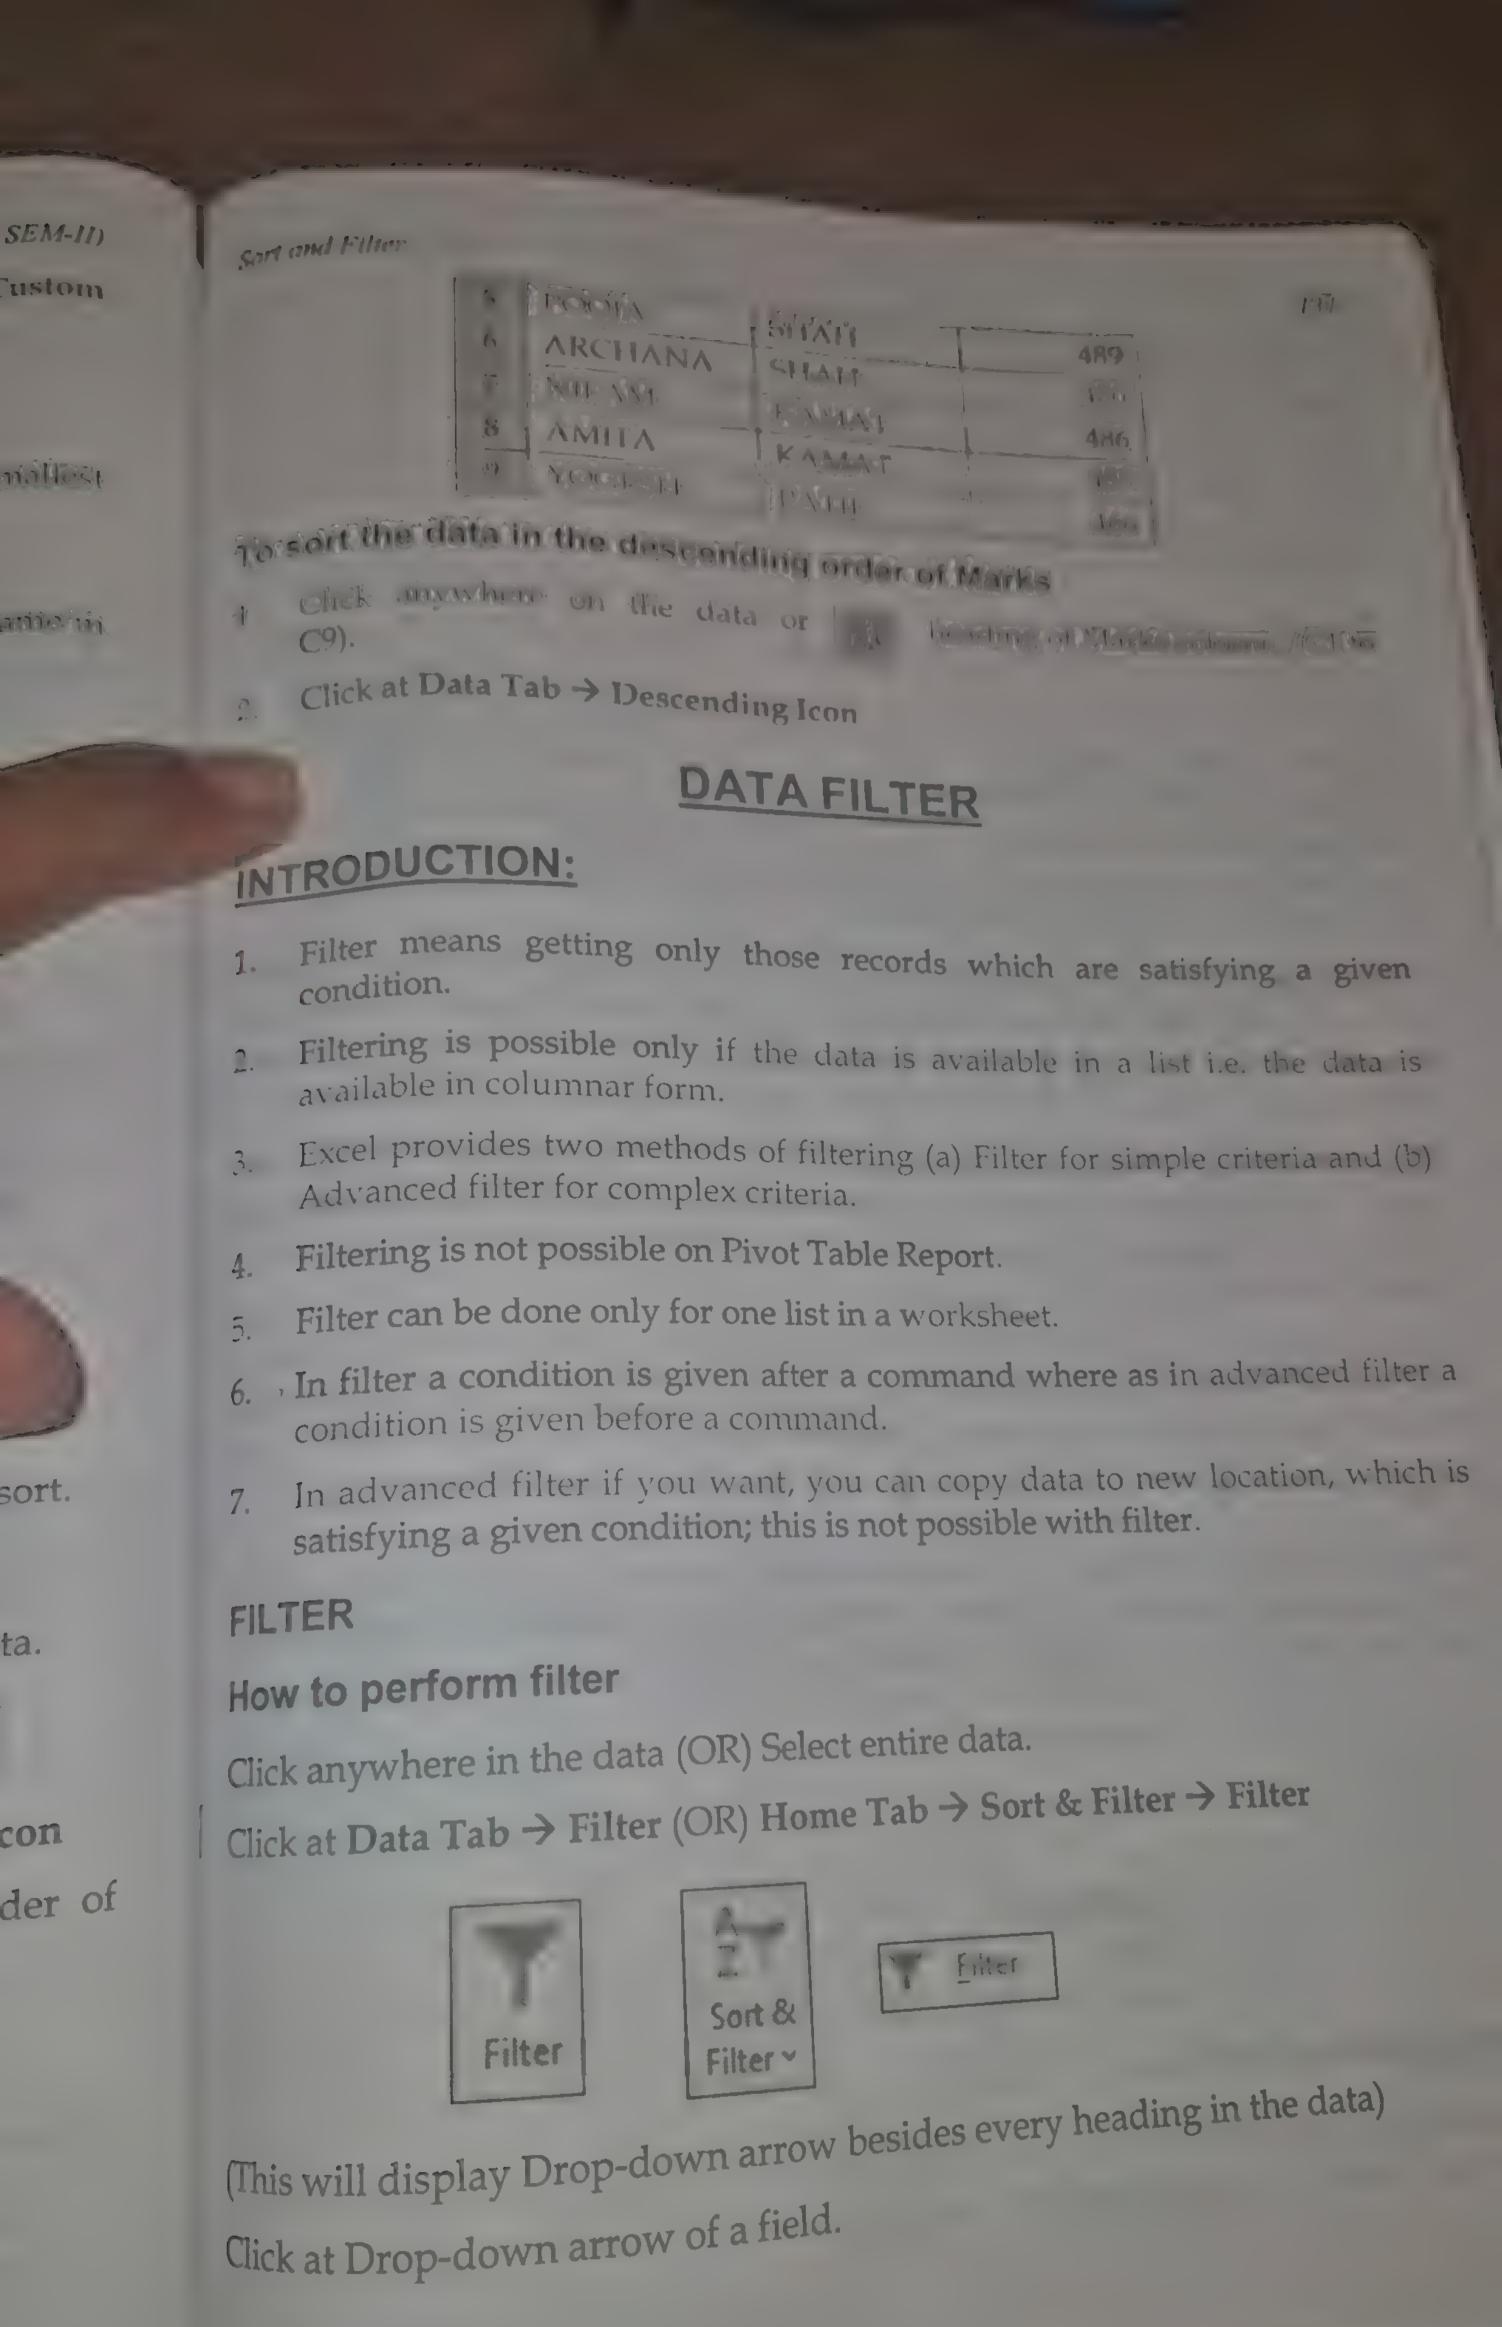

Click at Proper option.

Once concluded Dropologica of the Home of following options:

Stife Similar Man Paris it Notes Z. Orchesta News of In out the data in ascending properly a with the property of the country of the property of

South Principal to Semalificative to National to Olders the region while wholes in the in a group page a public Newson our sale with the limiter

Souther color happentemate whom out the printening withing animaltaple helds

Clear holder From ' Renditiplan all the mours of the hidden. He to remove the filter.

Unique Values: (select All) to display all the receirds. To display only those records which are equal to the value select particular value/s.

Number Filters/ Text Filters: If you are using Drop-down Arrow of a Numeric field then you will get Number Filters and if you are using Drop-down Arrow of Text field then you will get Text Filters.


Number Filters: Number tilters are - Equals, Does Not Equal, Greater Than, Greater Than Or Equal To, Less Than, Less Than Or Equal To, Between, Top 10, Above Average, Below Average, Custom Filter. (Custom Filter means condition/s will be given in the last dialog box).

Text Filters: Text Filters are Equals, Does Not Equal, Begins With, Ends With, Contains, Does Not Contain, Custom Filter. [Custom Filter is generally required for Does Not Begin With and Does Not End With] (Custom Filter means condition/s will be given in the last dialog box).

In case of Date, the Date Filters are: Equals, Before, After, Between, Today. Tomorrow, Yesterday, Next Week, This Week, Last Week, Next Month, This Month, Last Month, Next Quarter, This Quarter

Top 10:

To display the top / bottom 'n' number of records, select Top 10. With this option you can get top/bottom 'n' number of records. In the second box you have to type the value. Default value in the second box is 10.

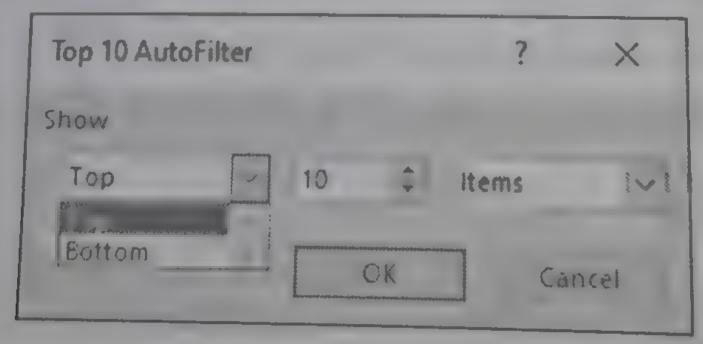

Above/Below Average:

To display records which are above or below average you can use this option. Average is calculated automatically by Excel.

"" " Filte "Ilowing in is give lick at Dr


il son 11 52n Sort

N₁

In CO

> In y


> > C

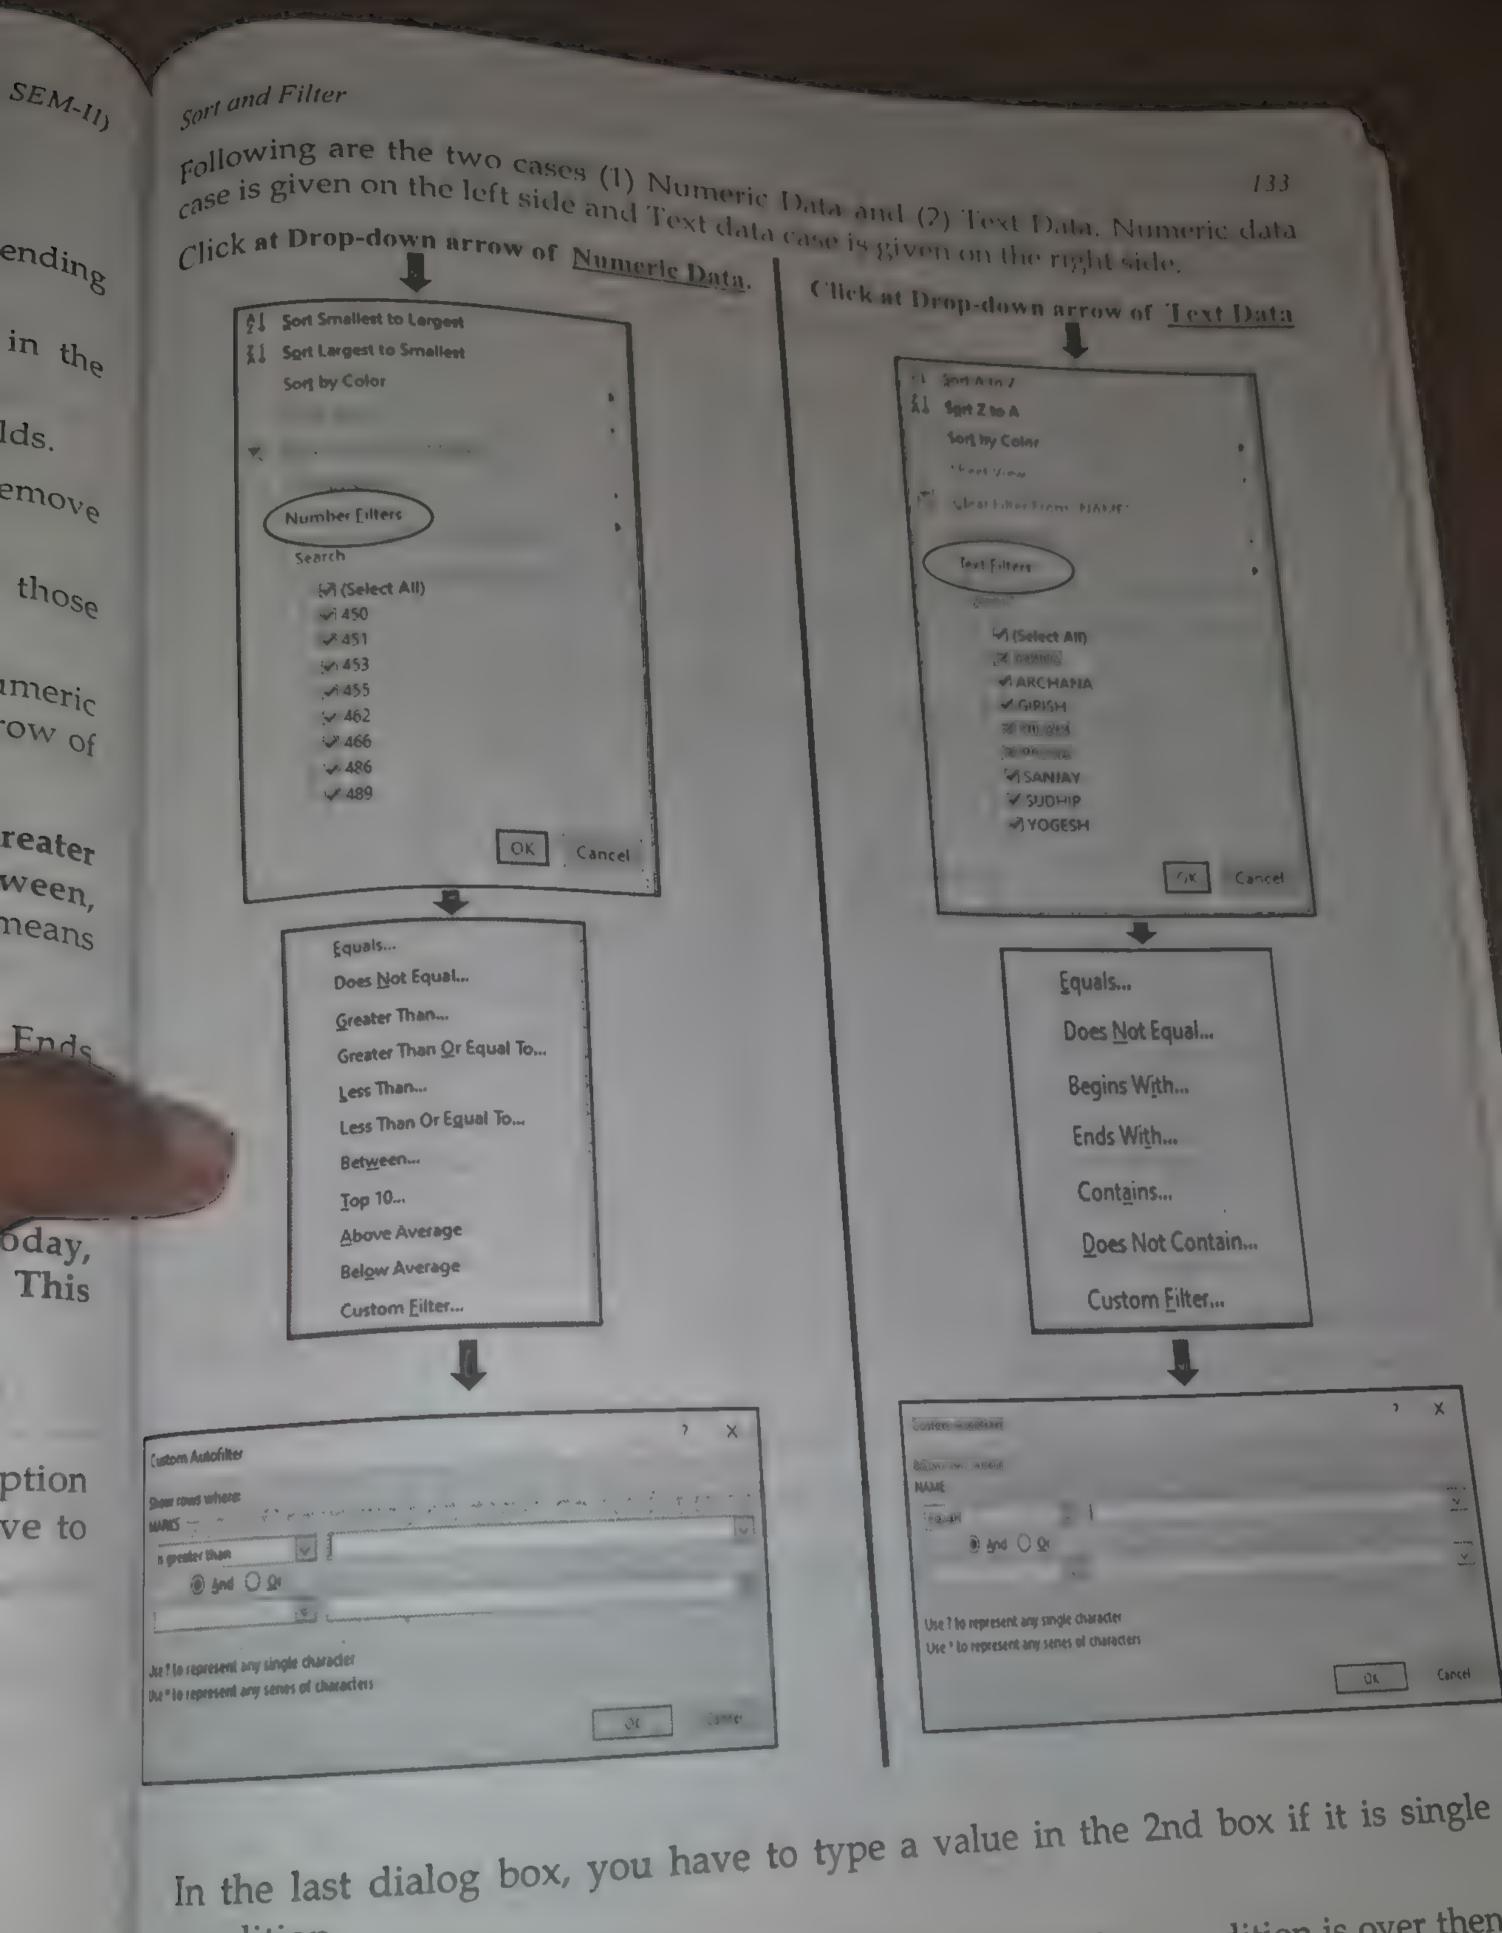

In case of double condition on a single field, once the first condition is over then you have to select logical operator And / Or and then you have to give the 2nd condition using 3rd and 4th box.

tion.

If you click at the Drop-down arrow of 1st box or 3rd box then Excel will display 12 options as hollows and you can select any one of them.

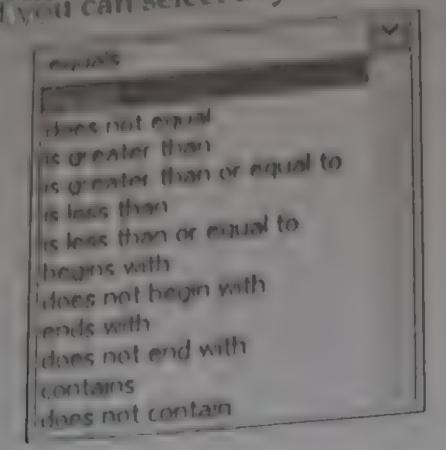

Example:

		1	C	D	E
-4	A	B	M2	M3	Total
1	Name	M1	72	61	202
2	SUNIL	69	48	37	130
3	ANIL	45		70	229
4	YALA	78		89	286
5	AJIT	97	S. The state of th	A A N	169
6	SMITA	58	En and the speciment appropriate to	Same remaining which a	Service appropriate to the service of the service o
7	ANITA	40	43	Egym sam a sammana paparagan and market samma harring samma samma	The the second section and the second section and the second
8	JAY	56	59	Se de la la tratafa calente la proposition de proposition de la proposition de la proposition de la proposition de la la proposition de la	guinness and the second
9	VUAY	67	70	59	196
10	JAYESH	78	81	70	229
11	JATIN	94	97	. 86	277
***************************************	JAYA	35	38	36	109

Consider the above worksheet. Now you want to display only those records (rows) where M2 is above 80.

- Click anywhere in the data. (OR) Select entire data.
- Click at Data Tab → Filter (OR) Click at Home Tab → Sort & Filter → Filter In response excel will display following screen, where each heading is having Drop-down arrows.

rds

er

is

1	^	()			
1	Name - M1				
2	SUNIL	* M2	~ M3	t	
3	ANIL	69		Total	
-4.	AJAY	15	72	61	202
5	TILA	78	48	37	130
		97	81	70	2)3
6	SMITA		100	89	
7	ANITA	58	61		286
13	JAY	(40)	(4)3	30	160
		36		[32.	108
9	YALIV		59	48.	163
10	JAYESH	67	70	59	
11		78	t	the second	196
be envisor.		94	81	70	229
12	JAYA	ţ	97	86	277
***		35	38	A 1 Aug	•
D		-	1	36	109

115

- Click at Drop-down arrow of M2, because condition depends on M2.
 - Click at Number Filters
 - Click at Greater Than
 - In the 2nd box type 80
 - Click at Ok button.

Now excel will display only those records which are satisfying the given condition and Excel will hide all the rows which are not satisfying the given condition, as given below.

	A	8	C	D	E	-
1	Name 💌	M1 -	M2 T	M3 🔻	Total	7
4	AJAY	78	81	70	The same also received to the same of	229
5	AJIT	97	100	89	and the second second	286
10	IAYESH	78	81	70	Life and the second	229
11	LATIN	94	97	7 86	5	277
13	 and a contract contribution where is a shifteen in the eight of the ei			1	3	

To display all the records once again

Click at Drop-down arrow of M2

Click at Clear Filter From "M2"

(OR)

Click at Data Tab → Clear

TO REMOVE AUTO FILTER

Click at Data Tab → Filter (OR) Click at Home Tab → Sort & Filter → Filter It removes the Drop-down arrows, which are besides the headings.

If you want to display only those records where M3 is between 60 and 80 both inclusive then the Auto filter procedure is as follows.

- Click anywhere in the data.
- Click at Data Tab -> Filter (Omit this step, if the list is having Drop-down arrows next to headings)
- Click the drop-down arrow of M3 3.
 - Click at Number Filters
 - Click at Between
 - In the 2nd box type 60
 - Click at 4th box and type 80
 - Click at Ok button.

Now excel will display those records which are satisfying the given condition.

TO REDISPLAY ALL THE RECORDS

Click at Data Tab → Clear

(OR) Click at Drop-down arrow of M3

Click at Clear Filter From "M3"

To display all the records where name is ending with 'A', the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab → Filter (Omit this step, if the list is having Drop-down arrows next to headings)
- 3. Click the drop-down arrow of Name
 - Click at Text Filters
 - Click at Ends With
 - In the 2nd box type A
 - Click at Ok button.

Now excel will display those records which are satisfying the given condition.

Alternatively, you can select Equals and in the 2nd box type *A

TO REDISPLAY ALL THE RECORDS

Click at Data Tab -> Clear (OR) Click at Drop-down arrow of Name

Click at Clear Filter From "Name"

To display all the records where name is not ending with 'Y', the procedure will be as follows.

Click anywhere in the data.

cort and Filter om.-MS: SEM-II Click at Data Tab > Filter (Omit this of the list in having Drop-down een 60 and 80 Click the drop-down and of Name Click at Text Filters g Drop-down Click at Custom Filter Click at Drop-down arrow of 1st Box and select, Does not End With Click at Ok button. Now excel will display those records which are satisfying the given condition Alternatively, you can select Does not Equal and in the 2 There type *Y TO REDISPLAY ALL THE RECORDS ondition. Click at Data Tab -> Clear (OR) Click at Drop-down arrow of Name Click at Clear Filter From "Name" of M3 If you want to display only those records where TOTAL is below 125 or above 250, then the Auto filter procedure is as follows. " M3" Click anywhere in the data. cedure Click at Data Tab → Filter (Omit this step, if the list is having Drop-down arrows next to headings) 3. Click the drop-down arrow of Total Drop-down Click at Number Filters Click at Custom Filter Click at Drop-down arrow of 1st Box and select, Is Less Than In the 2nd box type 125 Click at logical operator Or Click at Drop-down arrow of 3rd Box and select, Is Greater Than Click at 4th box and type 250 ndition. Now excel will display those records which are satisfying the given condition. Click at Ok button. TO REDISPLAY ALL THE RECORDS Click at Data Tab → Clear (OR) Click at Drop-down arrow of Total To display all the records where second character of name is 'A', the Click at Clear Filter From "Total" h 'Y', the procedure will be as follows.

sof

138

- Click anywhere in the data
- Click at Data tab > Filter (Chill this step, if the list is having Drop-down arrows next to headings)
- Click the drop-down arrow of Name
 - Click at Text Filters
 - Click at Equals
 - In the 2nd box type ?A*
 - Click at Ok button.

Now excel will display those records which are satisfying the given condition.

TO REDISPLAY ALL THE RECORDS

(OR) Click at Drop-down arrow of Name Click at Data Tab → Clear

Click at Clear Filter From "Name"

Look at some more conditions: (Note: ? and * are called as wild card characters)

Condition	Operator	What to type in the 2 nd box
2 nd character of name is I	Equals	?I*
3rd character of name is E	Equals	??E*
2nd last character of name is A	Equals	*A?
3rd last character of name is J	Equals	*J??
2 nd character of name is not I	Does Not Equal	?I*
3 rd last character of name is not J	Does Not Equal	*J??
Length of name is 5 characters	Equals	?????

To display top 5 records based on total, the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab → Filter (Omit this step, if the list is having Drop-down arrows next to headings)
- 3. Click the drop-down arrow of Total
 - Click at Number Filters
 - Click at Top 10
 - In the 2nd box type 5
 - Click at Ok button.

Top 10 AutoFilter X Show Top Items OK Cancel

Now excel will display top 5 records as per Total.



s)

the


wn

gort and Filter

10 REDISPLAY ALL THE RECORDS

olick at Data Lab & Clear Click at Drop-down arremaphoral

Chokaile lear Tiller I rom Total"

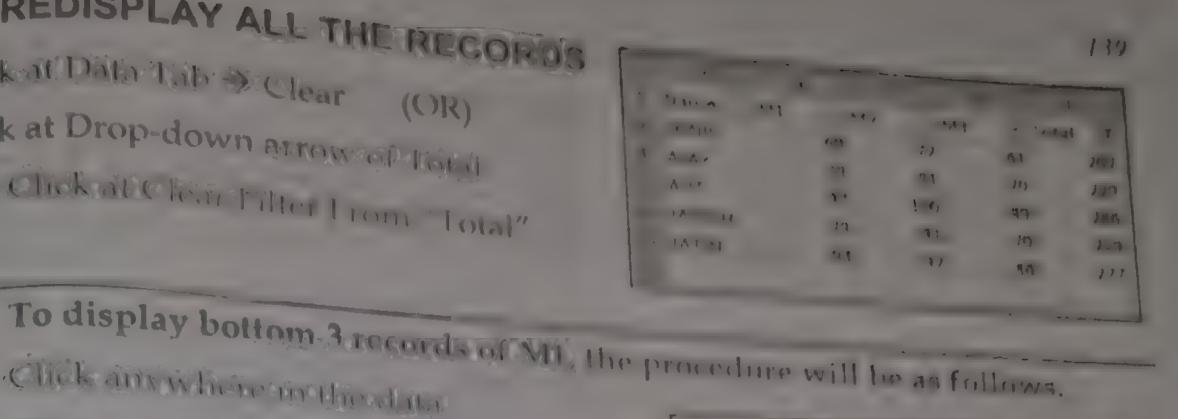

Top 10 AutoFilter

BETT TIM

- Click aim where no thread ita
- Click at Data Tab > Filter
- Click the drop-down arrow of MI 3.
 - Click at Number Eillers
 - Click at Top 10
 - Click at the Drop-down arrow of 1st box and select Bottom
 - In the 2nd box type 3
 - Click at Ok button.

Now excel will display bottom 3 records of M1 as follows:

	A		8	C	D	Ε	
1	Name	- M1	Y.	M2	▼ M3	Total	
3	ANIL		45		48	37	130
7	ANITA		40		43	32	115
12	JAYA		35		38	36	109

TO REDISPLAY ALL THE RECORDS

Click at Data Tab -> Clear

(OR) Click at Drop-down arrow of M1

Click at Clear Filter From "M1"

To display records where M1 is above average, the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab → Filter (Omit this step, if the list is having Drop-dow arrows next to headings)
- Click the drop-down arrow of M1 3.
 - Click at Number Filters
 - Click at Above Average

Now excel will display records where M1 is above average.

TO REDISPLAY ALL THE RECORDS

Clickat Pata-tab - Clear (OR) Chekat Drop down arrow of M1

Click at Clear Tiffer From "MI"

To display records where Total is below average, the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab & Falter (Comit This Step), if the list is having Drop-down arrows next to headings)
- Click the drop-down arrow of Total
 - Click at Number Filters
 - Click at Below Average

Now excel will display records where Total is below average.

TO REDISPLAY ALL THE RECORDS

Click at Data Tab -> Clear (OR) Click at Drop-down arrow of Total

Click at Clear Filter From "Total"

Sort the records in the descending order of Total, the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab → Filter (Omit this step, if the list is having Drop-down arrows next to headings)
- Click the drop-down arrow of Total
 - Click at Sort Largest to Smallest

Now excel will display the records in the descending order of Totals.

Sort the records in the alphabetical order of Name, the procedure will be as follows.

- Click anywhere in the data.
- Click at Data Tab -> Filter (Omit this step, if the list is having Drop-down arrows next to headings)
- Click the drop-down arrow of Name
 - Click at Sort A to Z

Now excel will display the records in the alphabetical order of Names.

Sort the records as per Department and within department in the descending order of Salary, the procedure will be as follows.

Click anywhere in the data.

SEM-II)

be as

TIME

be as

lown

ll be

own

the

Sort and Filter

- Click at Data Tab > Filter (Omit this week, if the last is having down 2: Click the drop down arrow of Department
- 3.
 - Click at Sort by Color
 - Click at Custom Sort
 - Click at the Drop-down arrow of Sort by, Select Department
 - Click at the Drop-down arrow of Order, Select A to Z.
 - Click at Add Level Button
 - Click at the Drop-down arrow of Then by, Select Salary
 - Click at the Drop-down arrow of Order, Select Largest to Smallest

Now excel will display the records in the alphabetical order of Department and within department in the descending order of Salary.

ADVANCED FILTER

In advanced filter you have to specify the criteria (condition) at any blank cells before you click at Data Tab -> Advanced. While specifying a condition in the first row you have to specify the headings and then in the next row specify the condition.

Examples of Criteria in the Advanced Filter

Age equals to 20.

AGE 20

Name is starting with 'S'.

NAME S*

Name is not starting with 'S'.

NAME <>S*

Name equal to AMIT.

NAME AMIT

142

5. Salary greater than 5000.

5	ALARY
-	5000

Salary less than ortoqual to 5000

SALARY	
<= 5000	

Name starting with 'S' or 2nd character of Name is 'A'.

NAME
S*
?A*

Salary less than or equal to 5000 or greater than 5700.

SALARY
< = 5000
> 5700

Age equal to 20 and Salary greater than 5000.

AGE	SALARY
20	> 5000

10. Age equal to 20 or Salary greater than 5000.

AGE	SALARY
20	
	> 5000

Age equal to 20 or Salary greater than 5000 or Name is starting with S.

AGE	SALARY	NAME
20		
	> 5000	
		S*

Age equal to 20 and Salary greater than 5000 and Name is starting with S.

AGE	SALARY	NAME
20	> 5000	S*

Note: While typing the complex condition for Advanced Filter, headings are always typed in the Same Row (i.e. in one line). In case of 'AND' the conditions are also typed in same row (i.e. in one line) but just below the headings. In case of 'OR' the conditions are typed diagonally (i.e. like steps).

How to At any b click an

click at gel SF


M-11)

How to perform Advanced Filter

At any blank cells type the condition as explained earlier Click anywhere in the data (OR) Selectivities data click at Data Tab > Advanced

- Select Proper Action.
- Specify List range (Data Range)
- Specify Criteria range (Condition Range)
- Specify Copy to location (if required)
- Click at Ok Button

Dialog box of Advanced Filter:

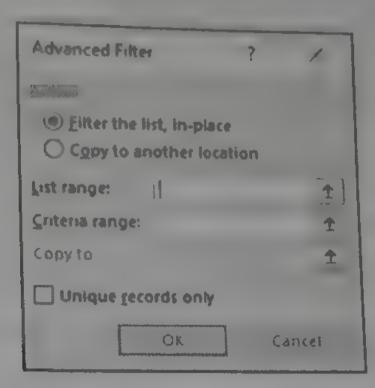

Example-1:

Perform advanced filter on above data. (Data is typed in cell A1 to E12). Condition is marks in each subject are above 75.

- Click at cell G1 and type M1 ←
- Click at cell G2 and type >75 ↔
- Click at cell H1 and type M2 ←
- Click at cell H2 and type >75 ←
- Click at cell I1 and type M3 →
- Click at cell I2 and type >75 ←

Condition can be typed in any blank cells.

- Click anywhere in the data.
- Click at Data Tab -> Advanced
 - Type List range as \$A\$1:\$E\$12 (OR) A1:E12
 - Type Criteria range as Sheet1!\$G\$1:\$I\$2 (OR) G1:I2
 - Click at Ok button.

Now Excel will display only those records which are satisfying a given condition and it will hide all the records which are not satisfying a given condition.

Not: List range means Data range and Criteria range means Condition range.

TO REDISPLAY ALL THE RECORDS.

T CHORLINDON TABLE OF CHEM

Example- 2:

Perform advanced filter on above data (Data in Aspect in all Miles 1912). Condition is marks in any subject are below 60.

- The Chick Street M. N. Example in special Miles
- 1. Pholosope 3600
- 3. Click at cell B15 and type M2 ←
- 4. Click at cell B17 and type <60 ↔
- 5. Click at cell C15 and type M3 ←
- Click at cell C18 and type <60 ↔

Note Circhitistic on bi toped in nannybhaithe cells.

- 7. Click anywhere in the data.
- 8. Click at Data Tab → Advanced.
 - Type List range as \$A\$1:\$E\$12 (OR) A1:E12
 - Type Criteria range as Sheet1!\$A\$15:\$C\$18 (OR) A15:C18
 - Click at Ok button.

Now Excel will display only those records which are satisfying a given condition and it will hide all the records which are not satisfying a given condition.

TO REDISPLAY ALL THE RECORDS.

1. Click at Data Tab → Clear

If you want to copy data to other location, which is satisfying a given condition; then you should click at Copy to another location in the Advanced filter dialog box. And then type the cell address at Copy to.

If you click at Unique records only check box, then excel will ignore duplicate records i.e. duplicate records will appear only once.

Example-3:

Name of employee, Age, Dept. and Salary are typed in a worksheet in cell A1 to cell D51. First row contains column headings. From this data copy the records of SALES department to cell J1 onwards.

- 1. Click at cell F1 and type DEPT.→
- 2. Click at cell F2 and type SALES

Condition can be typed in any blank cells.

- Click anywhere in the data. 3.
- Click at Data Tab -> Advanced. 4.

 - Select Action as Copy to another location
 - Type List range as \$A\$1:8D\$51 (OR) ALDSI
 - Type Criteria range as Sheet1!\$F\$1:\$F\$2 (OR) F1:F2 Type Copy to location as J1
 - Click at Ok button.

Now Excel will copy the records which are satisfying a given condition to cell J1 onwards; the original list will remain as it is. (No Hiding of records).

EXERCISE

145

7.	Multiple	Choice	Questions		C: .			
7	C		aucstions	-	Single	correct	answer	

- Sorting is possible maximum up to ___ level. (a) 16 (b) 32 (c) 64 (d) None of These
- Sorting is possible on _____ type of columnar data. 2.
 - (a) Numeric (b) Text (c) Date (d) All of these
- For Sorting, data should be available in _____ format. 3.
 - (a) Horizontal (b) Vertical (c) Any (d) No such restrictions
- In case of Filter, wild card character/s is/are_
 - (a)? (b) % (c) * (d) a & c
- For complex criteria we use _____ filter. 5.
 - (a) Custom (b) Advanced (c) Complex (d) None of These
- Filter is used to _____ the records which are satisfying the given condition. 6.
 - (a) Hide (b) Delete (c) Display (d) None of These

State whether the following statement are True/False: **B**.

- While sorting if two or more values in a sorting column are exactly the same then duplicate values are omitted.
- While sorting if two or more values in a sorting column are exactly the same then first come first principle is adopted.
- Quick sort can be used if you want to sort on a single column. 3.
- You cannot sort on a date column.
- For arranging the data in Ascending or Descending order you require Sort.
- Sort option is available under Home Tab as well as Data Tab. 5.
- You can sort the data through Filter option also.
- Filter is also called as Advanced Filter.
- Quick sort will display a dialog box. Without column headings, sorting is not possible. 9.

(a)

; (e

11. Filter will hide those records which are satisfying a given condition.

C. Practical Questions:

- 1. Consider the following worksheet:
- (a) Arrange the data in alphabetical order of NAME.
- (b) Arrange the data in the descending order of SALARY.
- (c) Arrange the data in the ascending order of AGE.
- (d) Arrange the data as per DEPT and within DEPT as per SALARY.
- (e) Arrange the data as per DEPT and within DEPT in the Descending order of SALARY.
- (f) Arrange the data as per descending order of AGE and within age in the descending order of SALARY.
- (g) Arrange the data in such a way that oldest employees record is displayed first so on, the youngest employees record is displayed at the end.
- (h) Arrange the records as per Department, within Department as per Age and within Age as per Salary.
- (i) Display only those rows where Department is 'ADMN'
- (j) Display only those rows where Department is not 'ADMN'
- (k) Display only those rows where Salary is 12,000.
- (l) Display only those rows where Salary is below average Salary.
- (m) Display only those rows where Salary is more than 13,000 but less than 15,500.
- (n) Display only those rows where Salary is more than 13,500.
- (o) Display only those rows where age is up to 25.
- (p) Display only those rows where name contains alphabet 'I'
- (q) Display only those rows where name is starting with alphabet 'S'
- (r) Display only those rows where name is ending with alphabet 'A'
- (s) Display only those rows where 2nd character of name is 'E'
- (t) Display only those rows where 2nd last character of name is 'I'
- (u) Display only those rows where 2nd character of name is not 'A'
- (v) Display only those rows where name is having exact 6 characters.
- (w) Display only those rows where Salary is 13,500 or less.
- (x) Display salary-wise top 5 employees.
- (y) Display records of 3 youngest employees.
- (z) Display records where name is of 6 characters and 3rd character of name is 'N'.

				The state of the s
	٨	В	C	D
1	NAME	AGE	DEPT	SALARY
2	SUDHIR	23	ADMN	12000
3	SKY		A/C	13000
4	SANIAY		PUR	15000
5	ALISHA	22	A/C	14000
6	IMMIA	22	PUR	13500
7	JESSE	1 1	ADMN	15500
8	SANCIA	25	ADMN	13000
g	SHANIZA	24	SALES	12000
10	MUSCAN	28	PUR	14000
11	DEEP	22	PUR	15500
12	MANAN	28	SALES	12000

D

SALARY

12000

13000

15000

14000

13500

15500

13000

12000

14000

15500

12000

- Consider the following worksheet
- Display the rows where Name is starting (n)
- Display the rows where Name is starting (b)
- Display the rows where Department
- Displantacing of the large age is either 21 or
- Insplay the records where Age is alone 21 and salary is below 10,000
- Display the records where Name is starting (1) with S and Salary is below 15,000.
- Display rows where age is 22 and Salary is less than 15,000 and Name is ending (3)
- Display rows where age is 22 or Salary is less than 15,000 or Name is ending with A. (h) Consider the following worksheet:
- Display records where marks in English are above 69.
- Display records where marks in each subject is above 69.
- Display records where marks in any (c) subject is above 72.
- Display records where marks in English and Science each above 72.
- Display records where marks in Maths and Science each above 80.
- Display records where marks in Maths are below 80.
- Hide the records where Name is starting with 'M'

Answers:

MCQs: (1) - (c), (2 - (d), (3 - (b), (4 - (d), (5 - (b), (6) - (c)))

True: 2, 3, 5, 6, 7

False: 1, 4, 8, 9, 10, 11

1 (4)	NAME 23 ADMN 25 A/C 27 ADMN 25 A/C 27 AD	SALARA 13000 1 Sanon 1 'Can	
-------	--	---	--

إكمر	·M	8	,	C	D
1	NAME	Engli	sh.	Maths	Science
2	SUDHIR		50	76	69
3	SKY		60	99	92
4	SANJAY		70	83	87
5	ALISHA		55	80	33
6	TANIA		64	79	63
7	JESSE		59	87	75
8	SANCIA		90	94	72
9	SHANIZA		68	30) 56
10	MUSCAN	his advantagement to	70	70	69
11	DEEP		45	8	0 66
12	MANAN	The state of the state of the state of	68	S	0 6.

The

Ma

331

SCENARIOS AND PIVOT TABLES

SCENARIO MANAGER

Scenario Manager is a powerful, flexible and useful tool used for what-if analysis, it allows users to create and compare different sets of values for formulas in a worksheet. By using Scenario Manager, you can create multiple scenarios where each scenario represents a different set of inputs, and then switch between these scenarios to see how changes in the inputs affect the outcomes. This is especially valuable for decision-making in finance, project management, and business forecasting.

Important Features of Scenario Manager:

- 1. Multiple Scenarios: You can create different scenarios for the same data set. For example, you could have scenarios for best case, worst case, and most likely case.
- 2. Comparison of Scenarios: After creating multiple scenarios, you can compare them side by side to see how changes in variables affect the results.
- 3. Scenario Summary Reports: Excel can generate a scenario summary report which shows all the scenarios and their outcomes in one table.

STEPS FOR SCENARIO:

1. Set up your worksheet:

- Ensure that your Excel worksheet is created with a set of input values and a formula dependent on those inputs.

2. Scenario Manager:

On the Data Tab → What-If Analysis → Scenario Manager.

3. Create a new scenario:

- Click at Add Button in the Scenario Manager dialog box.
- In the Scenario Name box, enter a suitable name for the scenario.
- In the Changing Cells box, enter the references of the cells whose values will change for the scenario. You can select multiple cells. (The number of changing cells for a Scenario is limited to 32.)
- Click at OK Button.

4. Enter values for the scenario:

- Enter the new values for the cells you want to change under this
- Click at OK Button.

5. Repeat for other scenarios:

Create additional scenarios by clicking Add and entering different values for the same changing cells or for different changing cells.

View or Switch between Scenarios:

Select a scenario from the Scenario Manager list and click Show to apply it to the worksheet. Excel will instantly update the worksheet based on the selected scenario's values.

Generate a Scenario Summary Report:

- Click Summary in the Scenario Manager.
- In the Scenario Summary dialog box, select the result cells that depend on the changing cells. Excel will then create a report showing all scenarios side by side, including the outcomes for each scenario.

Let us take one simple example for Profit Calculation using Scenario Manager.

The attached worksheet is showing profit for the month of January. Sales is entered in cell B1, Material Cost till Sales Cost is entered in cell B3 to B7. In cell B8, Total is calculated as sum of all cost, from Material Cost till Sales Cost. In cell B10, Profit is calculated as difference between Sales and Total Cost.

In the month of February, it is expected that Material Cost, Factory Cost and Sales Cost will be 33000, 11000 and 7000 respectively. Other amounts will be same as January.

In the month of March, it is expected that Material Cost, Factory Cost and Sales Cost will be 25000, 6000 and 9000 respectively. Other amounts will be same as January.

· 184 ;	' ' A	В
1	Sales	100000
2	Expenses	
3	Material Cost	30000
4	Labour Cost	.20000
- 5	Factory Cost	10000
6	Office Cost	5000
7	Sales Cost	8000
8	Total	73000
÷9	Tourism of the second of the s	
10	Profit :	27000
11		

In the month of April, it is expected that Material Cost, Factory Cost and Sales Cost will be 32000, 13000 and 8000 respectively. Other amounts will be same as

Create Scenarios for the month of February, March and April. Also show summary report showing Sales, Total Cost and Profit.

St

n

es

1es

rec

1. Create the above worksheet. In cell B8 type a formula as =SUM(B3:B7), in cell B10 type a formula as =B1-B8. In all other cell type, the respective values. 150

Click at Data Tab > What lik Analysis -> Scenario Manager.

Click at Add Button.

Type Secration Name as Reb

Type Changing cell, 183, 85, 87

Click at Ok Button.

Type Changing Values as 33000, 11000, 7000 respectively Click at Ok Button (With this first Scenario is created; now let us create the second Scenario)

Click at Add Button. Type Scenario Name as Mar Type Changing cell as B3, B5, B7

Click at Ok Button.


Type Changing Values as 25000, 6000, 9000 respectively Click at Ok Button (With this Second Scenario is created; now let us create the third Scenario)


Click at Add Button. Type Scenario Name as Apr Type Changing cell as B3, B5, B7


Click at Ok Button.


Type Changing Values as 32000, 13000, 8000 respectively Click at Ok Button


(With this third Scenario is created; now we can display the Summary or we can display any Scenario)

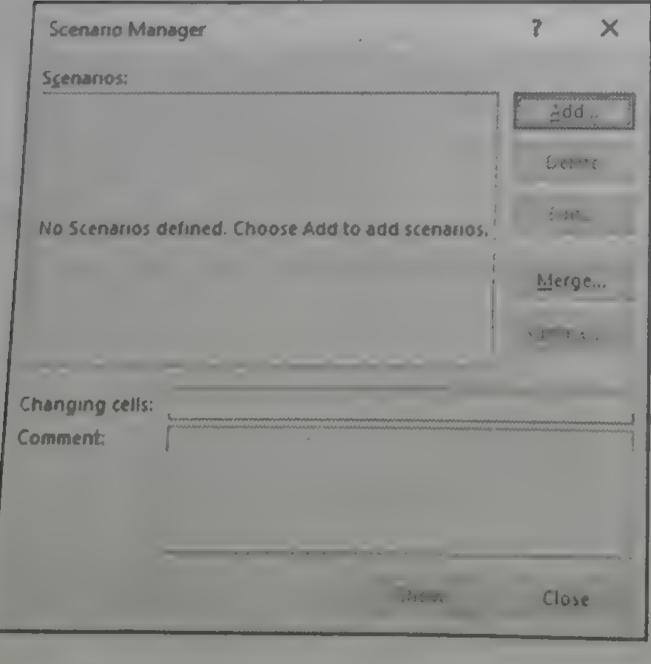


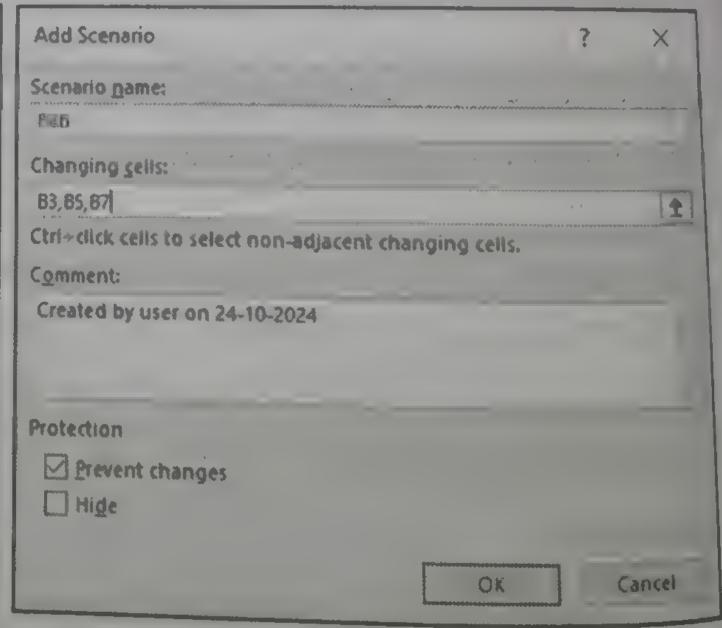

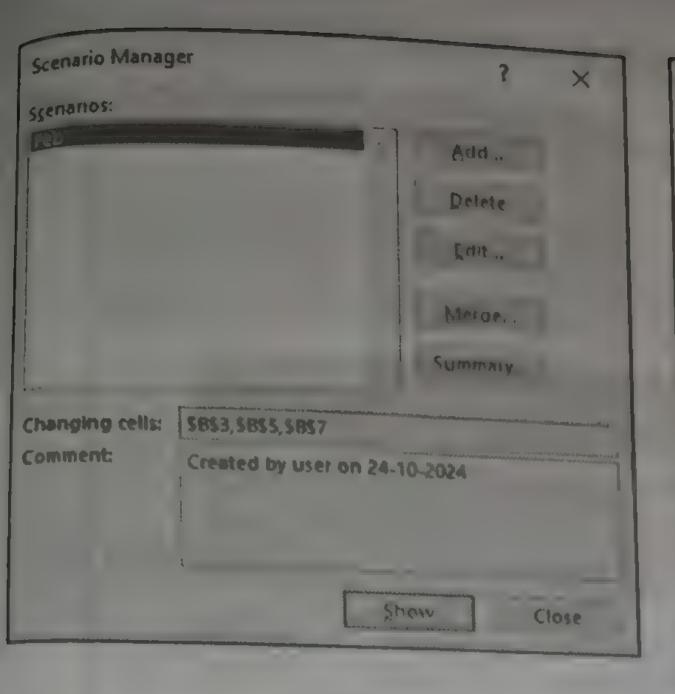

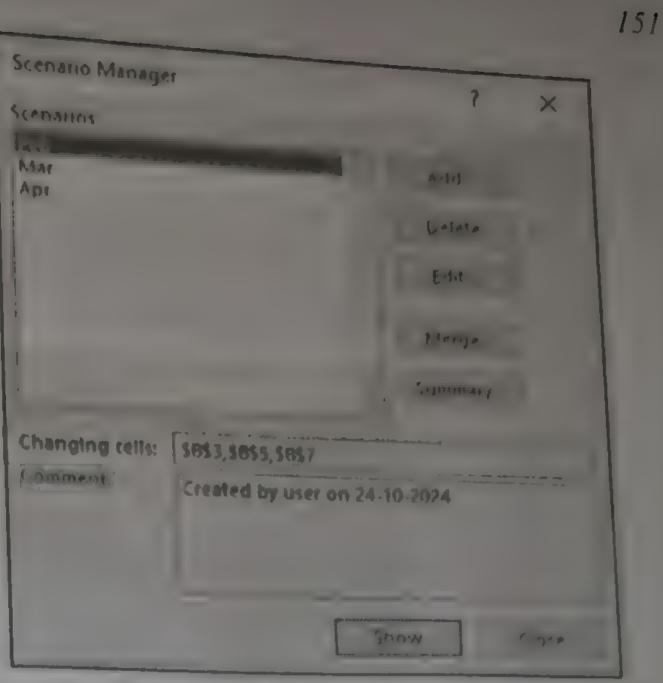

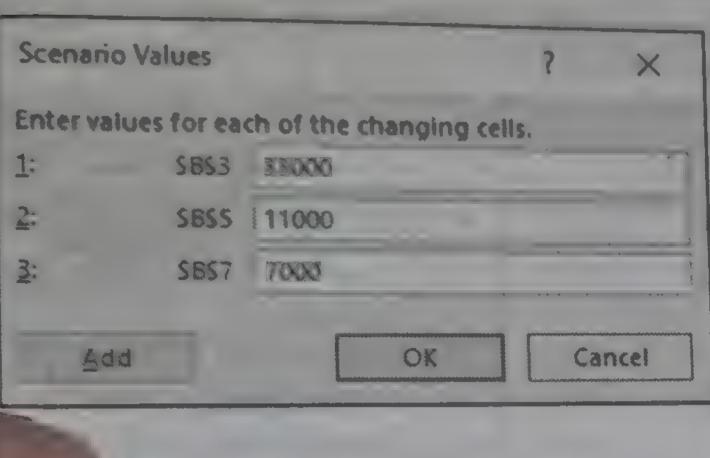

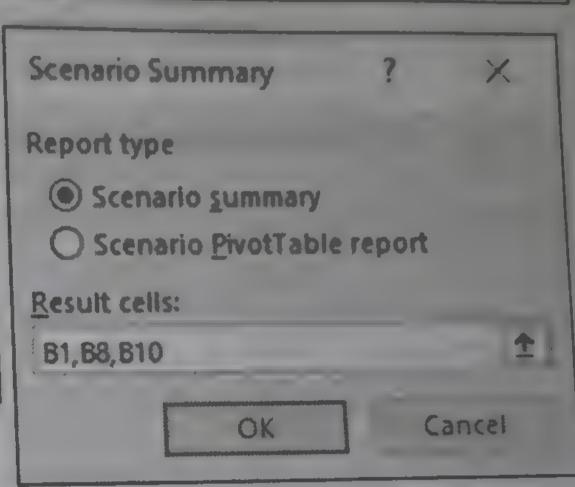

- Now to display any of the created Scenarios, click at the Scenario name and click at Show Button.
- To see the summary, click at Summary Button 10.
 - In the Result cells type B1, B8, B10 (As we want to see effect on these 3 cells) Click at Ok Button.

(Excel will display the Summary of all the Scenarios along with the original values in the new sheet.)

Click at Close button to close Scenario Manager.


(Next time, when you will start Scenario Manager you will see all the Scenarios created earlier, you can Add / Delete/ Edit scenarios).

Filter

Com

Sort

SUMMARY

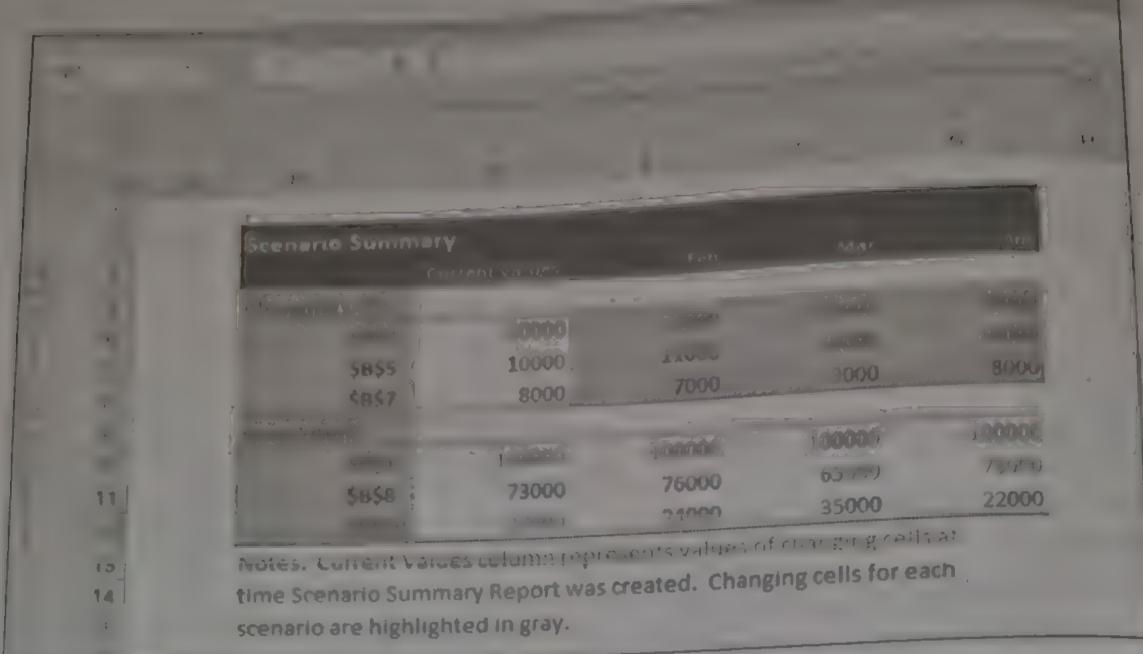

	8
. 53100	100.00
2 Expenses	
3 Material Cost	33000
4 Labour Cost	20000
5 Factory Cost	11000
6 Office Cost	5000
7 Sales Cost	7000
Total	76000
5	
O Profit	24000

3	Α	8
	Sales	100000
2	Expenses	4
3	Material Cost	25000
4	Labour Cost	20000.
5	Factory Cost	6000
6	Office Cost	5000
7	Sales Cost	9000
	Total	65000
9		
10	Profit	35000
		^

A	В
1 Sales	100000
2 Expenses	Amount District out at a same
3 Material Cost	32000
4 Labour Cost	20000
5 Factory Cost	13000
6 Office Cost	5000
7 Sales Cost	8000
Total	75.200
ġ,	3
10 Profit	22000

Feb Scenario

Mar Scenario

Apr Scenario

PIVOT TABLES

WHAT IS A PIVOT TABLE?

A Pivot Table in Excel is a powerful tool that allows you to summarise, analyse, explore, and present your data in a flexible and dynamic way. It enables you to transform large datasets into meaningful reports by easily grouping, filtering, and sorting data without altering the original dataset. Pivot table gives you a quick report and further if you want then you can get pivot chart also. The Pivot table report is always sorted, organised, and summarised. Pivot table report can be placed on existing worksheet or on a new worksheet as per your requirement.

TO THE ALL PROPERTY OF THE PRO

SEM-11)

000

000

000

00

alyse,

ou to

ering,

you a

Pivot

rt can

nent.

MPORTANT POINTS ABOUT PIVOT TABLES:

- Summarisation: It allows quick data summannes, such an totals, accurrent,
- Grouping: Organise data into categories and subscribe the contractions
- Filtering Easily filter the data you want to focusion
- Sorting Order the data in ascending order ending order
- Dynamic: You can easily drag and chop held-dochange the structure of the

STEPS TO CREATE A PIVOT TABLE IN EXCEL:

- 1. Select the Data Range: Highlight the range of data you want to analyse. (OR) Click anywhere in the data.
- 2. Insert a Pivot Table:
 - Click at Insert Tab → Pivot Table Icon
 - In the dialog box, confirm the range and choose whether to place the Pivot Table in a new or existing worksheet.
- 3. Design the Pivot Table:
 - Pivot Table Field List: Once the table is inserted, you will see the Pivot Table Field pane on the right.
 - Drag and drop fields into four areas:
 - Rows: Categories for rows.
 - Columns: Categories for columns.
 - Values: Data to be summarised.

Common Functions in Pivot Tables: (You can have one or more)

- Sum: Adds the selected data values. (Default for Numeric Field)
- Average: Finds the average of the selected data.
- Count: Counts the number of entries. (Default for Text Field)
- Max/Min: Finds the maximum or minimum values.
- Filters: Used to filter specific data subsets.

PIVOT TABLE OPTIONS:

Sort: You can sort rows or columns in ascending or descending order.

Filter: You can apply filters to only display relevant data.

Drag 1

want

Drag

auton

NAM

becor

Drag

autoi

SAL

field

We

high

On

Va

of

Sa

ch

se

Refresh: When the underlying data changes, the Pivot Table does not update automatically. You must click Refresh (under the Pivot Table Analyse Tab). (OR) Data Tab & Retresh All Icon.


Example: Consider the tellowing workshieft Create a department wife report showing Number of Employees, Highest Salary and Fotal Salary.

A A	B 1 6	1 (D)
1 NAME	AGE DEPT	SALARY
SUDMIR	23 ADMIN	12000
The second secon	25 A/C	13000
4 SANJAY	28 PUR	15000
A seed	22 A/C	14000
5 ALISHA	22 PUR	13500
6 TANIA	23 ADMN	15500
7 JESSE	25 ADMN	13000
8 SANCIA		12000
9 SHANIZA	24 SALES	
10 MUSCAN	28 PUR	14000
11 DEEP	22 PUR	15500
12 MANAN	28 SALES	12000

Solution:

Pivot Table

- Click anywhere in the data. (A1:D12)
- Click at Insert Tab → Pivot Table Icon
 - Select table range as A1:D12
 - Select New Worksheet
 - Click at Ok Button.

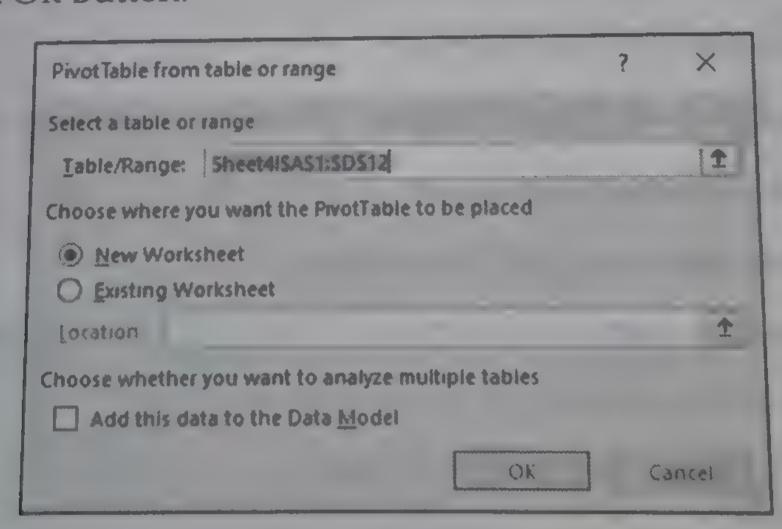


Now Excel will display PivotTable Fields dialog box as shown on the right-hand side.

EM-11) odate

(OR)

eport

- Drag DEPT field to Rows area. (As we want the report Department wise).
- Drag NAME field to E Values area, automatically it becomes Count of NAME. (As NAME is a text field it becomes Count automatically.)
- Drag SALARY field to \(\Sigma\) Values area, automatically it becomes Sum of SALARY. (As SALARY is a numeric field it becomes Sum of SALARY.) but, we do not want SUM, we want highest i.e. MAX. So, to change Sum of SALARY to Max of SALARY,
 - Click at Sum of SALARY;
 - Select Value Field Settings... from the available options
 - Select Max function and click at Ok Button.
- Once again drag SALARY field to S Values area, automatically it becomes Sum of SALARY. (This time we want total of Salary i.e. Sum of SALARY, so, do not change it.)
- Now click at any blank cell and you can

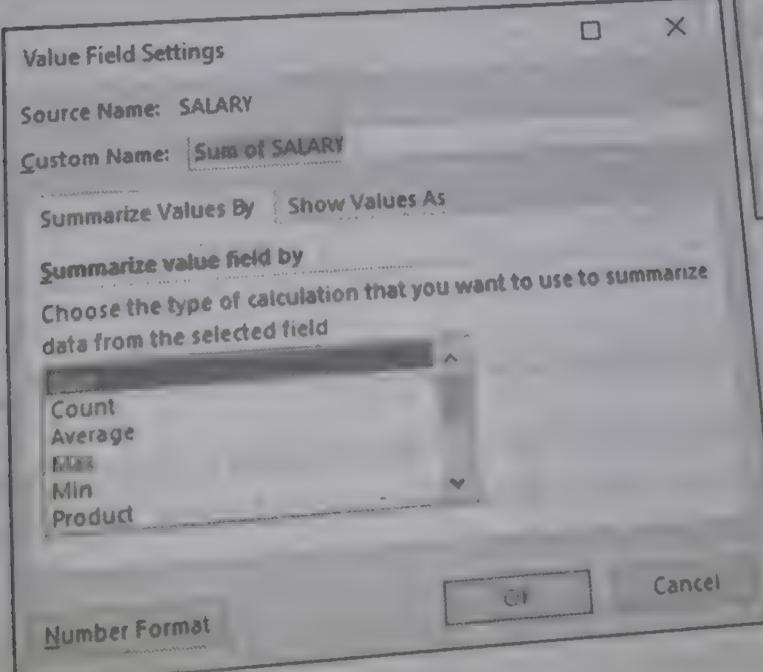

Pivot Lable Fields Charge for 1: to a 11 to report Search L NAME MACH DEPT SALARY More Tahles ... Drag fields between areas belown T Filters M Columns Defer Layout Update

Move Up

Move to Beginning

Move to Report Filter

Move to Row Labels 1 see the Pivot Table Report. Move to Column Labels Remove Field Value Field Settings...

ght-hand


277jrjg

40500


SRIGIN


74000

1497/10

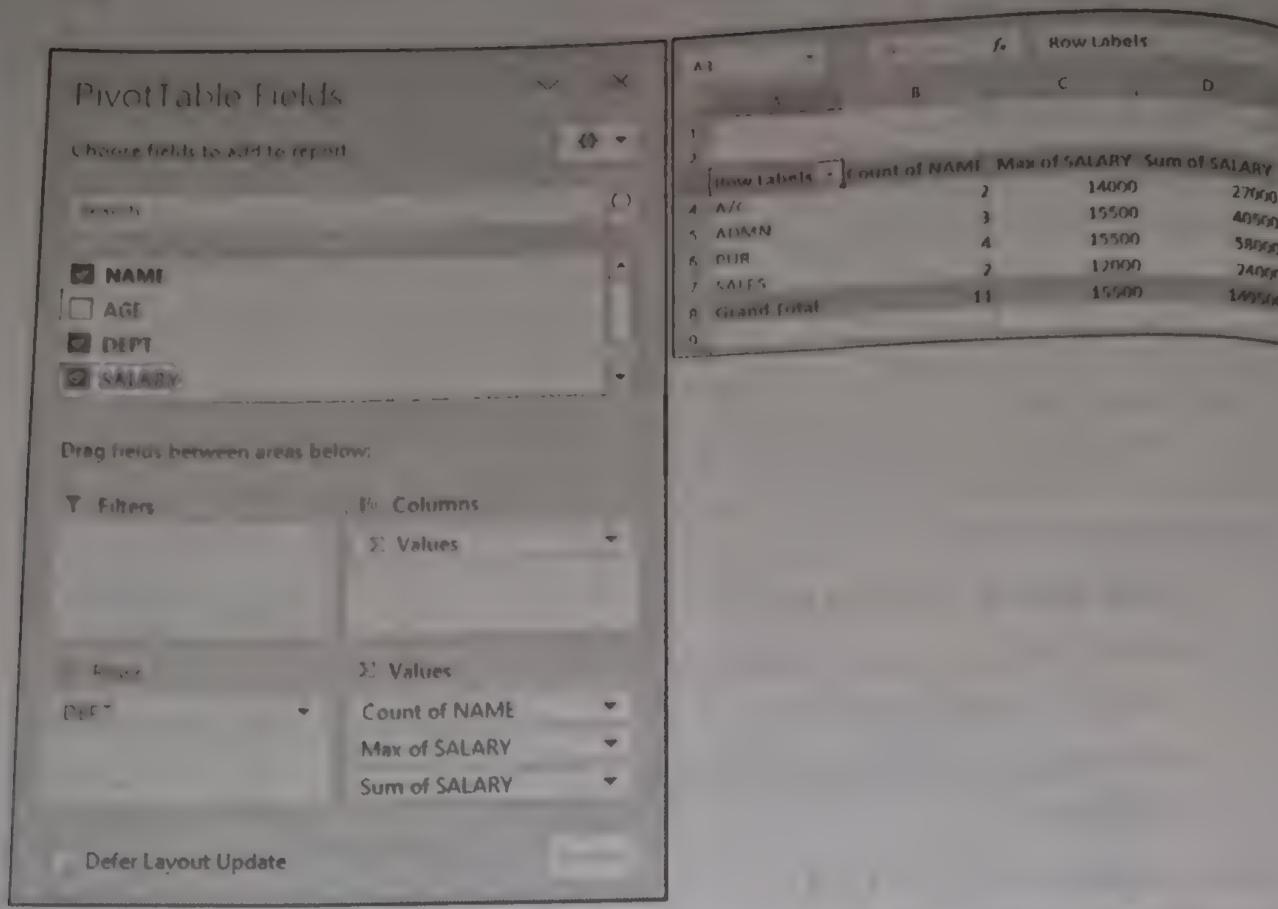

If you want to make any changes in the Pivot Table Report then click anywhere in the Pivot Table Report, Excel will display the Pivot Table Fields dialog box on the screen, now you can make changes in the Pivot Table Report.

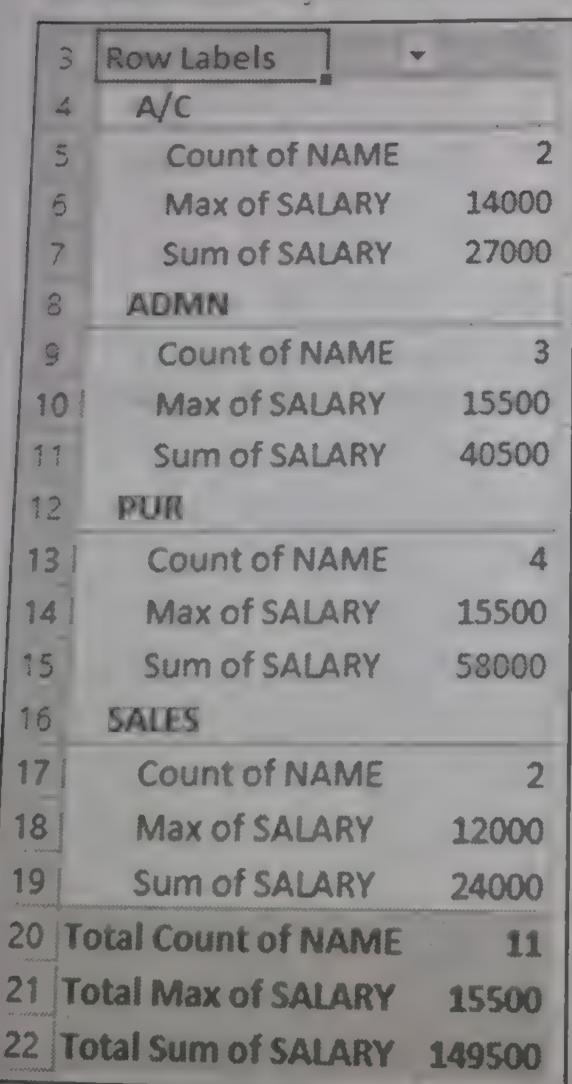

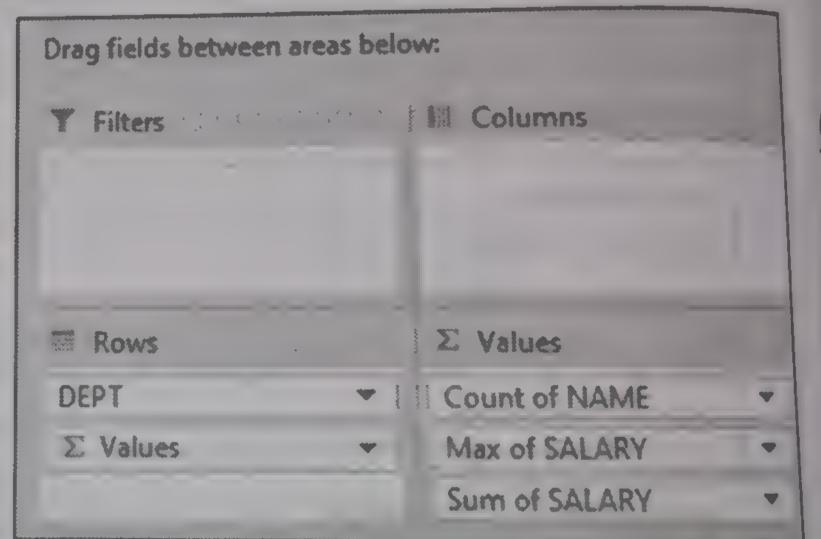

If you drag the Σ Values from Columns area to Rows area then the report layout will change as shown below.

You can change the layout of the report just by dragging from Columns area to Rows area and vice-a-versa.

Note: Pivot Table Report is not updated automatically when there is change in the original data. To update the Pivot Lable Report after the change in the original data you have to click anywhere in the Payof Table Report and click at Data Tab > Refresh All Icon

PIVOT CHARTS

A Pivot Chart is a visual representation of a Pivot Table II provide demaning visualisation that ejedates automatically as you interact with sour Proof lands (e.g., filtering sorting, and grouping)

STEPS FOR CREATING A PIVOT CHART:

Insert a Pivot Chart: 1.

- After creating a Pivot Table, click anywhere inside it.
- Go to the Insert tab, and select a chart type under Charts (e.g., Column. Line, Pie, etc.).
- Alternatively, you can go to the PivotTable Tools Analyse tab and select PivotChart.

Design the Chart:

ere

a to

nge

t by

area

- Excel will automatically generate a chart based on the current Pivot Table setup.
- Use the PivotChart Field List pane (similar to the Pivot Table pane) to modify the data being displayed.

CUSTOMIZING PIVOT CHARTS:

- Change Chart Type: Under the Design tab, you can change the type of the chart.
- Chart Elements: Add or remove elements like chart titles, legends, data labels, and gridlines using the Chart Elements button (found near the chart or under the Design tab).
- Formatting: You can format axes, bars, lines, and chart styles to make the chart visually appealing and easy to read.

Interactivity:

- Slicers: Excel allows you to add slicers (visual filters) to make it easier to
- Filters: Pivot Charts reflect any filters applied in the underlying Pivot Table, providing a dynamic and interactive experience.
- Drill-down: You can explore data in more detail by double-clicking chart elements to drill down into the data.

Common Chart Types for Pivot Charts:


- Column Chart: Ideal for comparing data across categories.
- Bar Chart: Similar to column charts, but horizontal.
- Line Chart: Great for showing trends over time.
- Pie Chart: Best for displaying the composition of data (e.g., sales by category).
- Scatter Plot: Useful for showing relationships between two variables.

DIFFERENCES BETWEEN PIVOT TABLES AND PIVOT CHARTS

Feature	Pivot Table	Pivot Chart	
Purpose	Summarise and analyse data in tabular format	Visualise data in graphical form	
Interactivity	Interactive table with drag- and-drop features	Interactive with filters and slicers	
Data Presentation	Data presented in rows and columns	Data presented graphically using charts	
Use Cases	Best for detailed data analysis and summaries	Best for making data easier to understand visually	
Updates	Updates with data changes after Refresh All command	Linked to a Pivot Table ar updates automatically	

Points to remember for Using Pivot Tables and Charts:

- Keep Source Data Clean: Ensure the dataset has no blank rows or columns, and each column has a clear header.
- Refresh Often: If the source data is dynamic, make sure to refresh the Pivot Table regularly.
- Use Slicers Carefully: While slicers add interactivity, too many can clutter your workbook.
- Choose the Right Chart Type: Use chart types that best represent your data (e.g., line charts for trends, pie charts for parts of a whole).

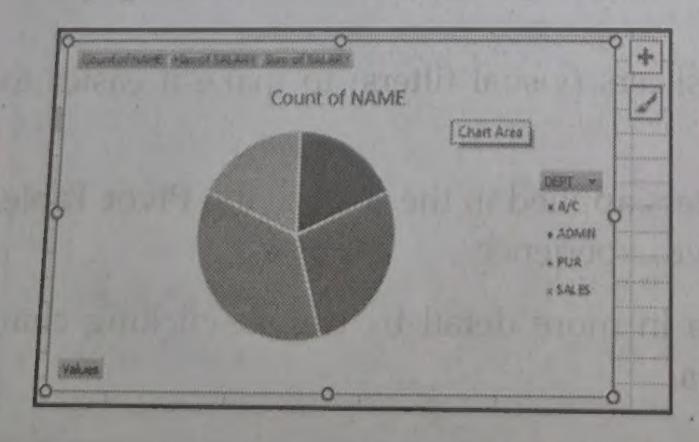

17)


to

nd

vot

tter

ata

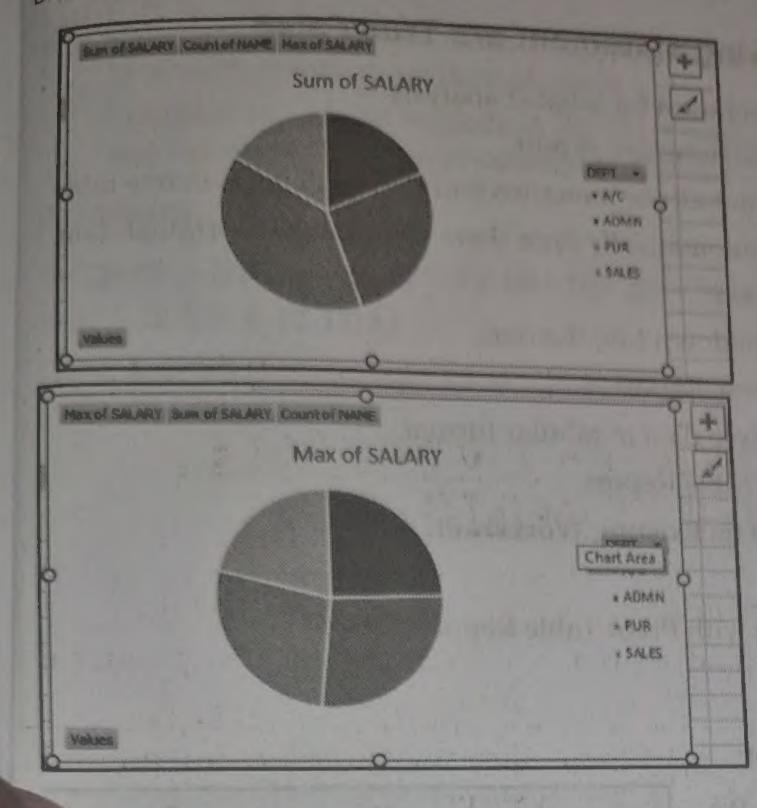

EXERCISE

A.	Multiple Choice Questions - Single correct answer:
1.	Scenario Manager option is available under Tab.
	(a) Home (b) Insert (c) Data (d) View
	Scenario Manager option is available under group. (a) Sort & Filter (b) Data Tools (c) Forecast (d) Outline The maximum number of changing cells for a Scenario is limited to (b) 32 (c) 64 (d) None of These
5.	Pivot Table Report is always (c) Summarised (d) All of These (a) Sorted (b) Organised (c) Summarised (d) All of These Pivot Table option is available under Tab. Pivot Table option is available under Tab. (a) Home (b) Insert (c) Data (d) View (a) Home (b) Insert (c) Data (d) View While constructing a Pivot Table, when you drag a text field to Σ Values area it
6.	becomes automatically. (a) Sum (b) Min (c) Max (d) Count While constructing a Pivot Table, when you drag a numeric field to Σ Values area it while constructing a Pivot Table, when you drag a numeric field to Σ Values area it
7.	becomes automatically (c) Max (d) Count
8.	(a) Sum (b) Mill (c) Pie (a) Line (b) Column (c) Pie (d) Area (d) Area

Col

Mil

CO

nu

MCQs:

True: 1.

False: 2

B. State whether the following statement are True/False:

- Scenario Manager is a useful tool used for what-if analysis.
- Excel cannot generate a scenario summary report.
- A scenario summary report shows all the scenarios and their outcomes in one table. 3.
- Pivot Table Report is updated automatically once there is a change in original data 4.
- Pivot Table report is always sorted. 5.
- With Pivot chart you cannot drill down into the data. 6.
- You can apply filters in Pivot Table Report. 7.
- Pivot Chart summarise and analyse data in tabular format. 8.
- Pivot Chart is linked with Pivot Table Report. Q.
- Pivot Table Report can be placed on Existing Worksheet. 10.
- Size of a chart can be changed.
- You can create Pivot Chart along with Pivot Table Report.

Practical Questions:

Consider the following worksheet:

Nationalised Bank is offering 7% p.a. interest rate. Co-op. Bank is offering 7.4% p.a. interest rate. Credit Society offers 7.75% p.a. interest rate. Create Scenarios for each case display summary report showing the interest rate and compound interest. Also display scenario of Co-op. Bank.

2.	Consider the following worksheet.					
	Create	scenarios	for	following	three	
	cases.				JE635	

- Best: HRA Rate 25% and DA Rate (a) 50%.
- Likely: HRA Rate 15% & DA Rate (b) 40%.
- Worst: HRA Rate 10% & DA Rate 15%. (c)
- Consider the following worksheet: 3.

Age-wise report showing Create Average of salary and total of salary.

d	A	В	C
1	Rate of Interest P.A.		8%
2	XB		
3	Amount	No. Of Years	Comp. Int.
4	150000	4	50320.37

	A	В	C	D	E
1	HRA Rate	. 5%			
2	DA Rate	10%			Land on 1
3					
4	Name	Basic	HRA	DA	Gross
5	Ajay	20000	1000	2000	23000
6	Vijay	25000	1250	2500	28750
7	Sunii	18000	900	1800	20700

	Α	В	C	D
1	NAME	AGE	DEPT	SALARY
2	SUDHIR	23	ADMN	12000
3	SKY	25	A/C	13000
4	SANJAY	28	PUR	15000
5	ALISHA	22	A/C	14000
6	TANIA	22	PUR	13500
7	JESSE	23	ADMN	15500
8	SANCIA	25	ADMN	13000
9	SHANIZA	24	SALES	12000
10	MUSCAN	28	PUR	1400
11	DEEP	22	PUR	1550
12	MANAN	2	SALES	1200

Scenarios and Pivot Tables

- Consider the above worksheet (Q. 3): Create a department-wise report showing
- Consider the above worksheet (Q. 3): Create a department-wise report showing number of employees and average of salary.

Answers:

MCQs: (1) - (c), (2) - (c), (3) - (b), (4) - (d), (5) - (b), (6) - (d), (7) - (a), (8) - (b)

True: 1, 3, 5, 7, 9, 10, 11, 12

False: 2, 4, 6, 8